



RoHS

Specification:


- Current Rating: 2.5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 800VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:


- Wire Range: 22AWG~28AWG
- Material: Brass, T=0.20mm
- Finish: Tin Plated
- Q'TY: 10,000Pcs/Reel

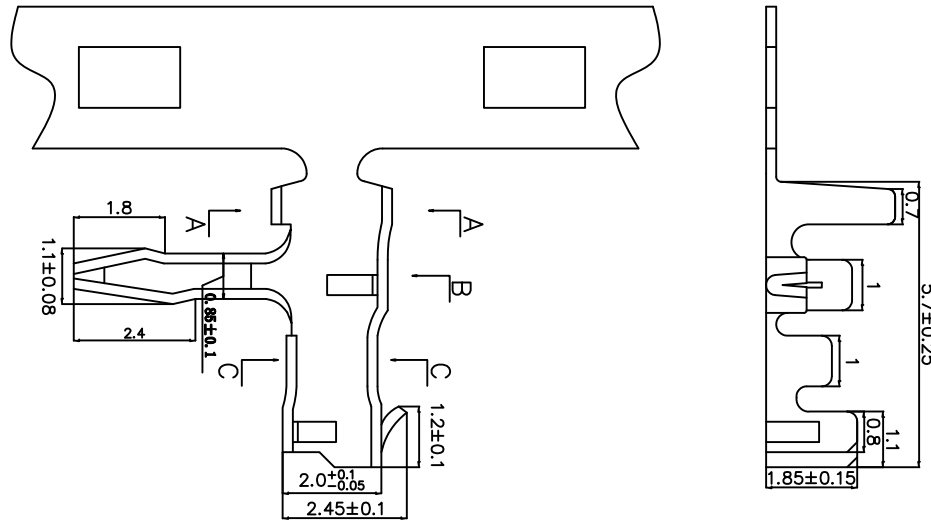

SECTION:A-A

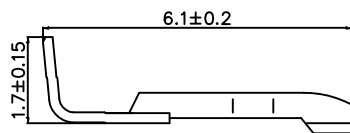

SECTION:B-B




SECTION:C-C

Ordering Information

SCT2517TR B S 109

Material:
B=Brass

Contact Plated
S=Tin Plated

					OPERATION	DRAW	Peng	2021.07.07	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2021.07.07	SIZE		A4
					X.XXX ±0.15	APPROVE	Allen	2021.07.07	SHEET	1/1		PART NO.
A1	2021.07.07	Changed from SCT2517TRP to SCT2517TRBS109			Angle				PROJ.	⊕	TITLE:	SCN 2.5mm 90° Terminal
AO	2015.03.03	NEW			DIM							
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE						