



RoHS

3.8±0.3      B±0.3      3.8±0.3

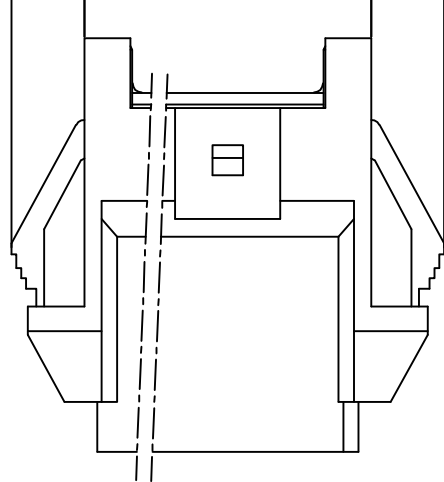

6.6±0.3

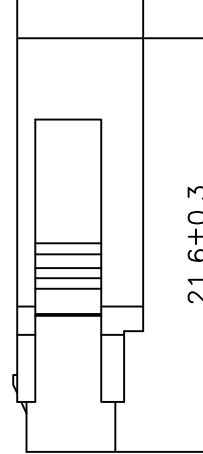


21.6±0.3

A±0.2

2.5±0.1

C±0.2

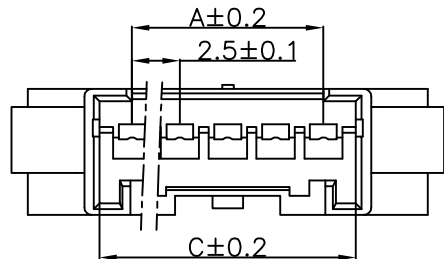

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 100VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:



- Insulator (Housing): Nylon 66 (UL94V-0/2)
- Color: Natural

Ordering Information

SCT2518FH - \*\* \* NA 154

No.of Pins See Table      Insulation B=PA66 V0 C=PA66 V2      Color NA=Natural

10	22.50	27.50	25.90				
9	20.00	25.00	23.40				
8	17.50	22.50	20.90				
7	15.00	20.00	18.40				
6	12.50	17.50	15.90	15	35.00	40.00	38.40
5	10.00	15.00	13.40	14	32.50	37.50	35.90
4	7.50	12.50	10.90	13	30.00	35.00	33.40
3	5.00	10.00	8.40	12	27.50	32.50	30.90
2	2.50	7.50	5.90	11	25.00	30.00	28.40
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

					OPERATION	DRAW	Peng	2021.03.15	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X      ±0.35	DESIGN			UNIT	mm	
					X.XX      ±0.25		CHECK	Peng	2021.03.15	SIZE	
AO	2021.03.15	NEW			Angle      ± 3'	APPROVE	Peng	2021.03.15	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION			CHANGE	APPROVE	Peng	2021.03.15	PROJ.	 TITLE:      XA 2.50mm Pitch Female Housing Connector	