

RoHS

Specification:


- Current Rating:3A AC/DC
- Voltage Rating: 1000V AC/DC
- Insulation Resistance:1000MΩ Min
- Contact resistance: 20mΩ (Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing):Nylon 66 (UL94-V0)
- Color: White

Ordering Information
SCT25414H-2XX B 0 WT 173

No.of Pins See Table B =PA66 Package 0=PE Bag Color WT=White

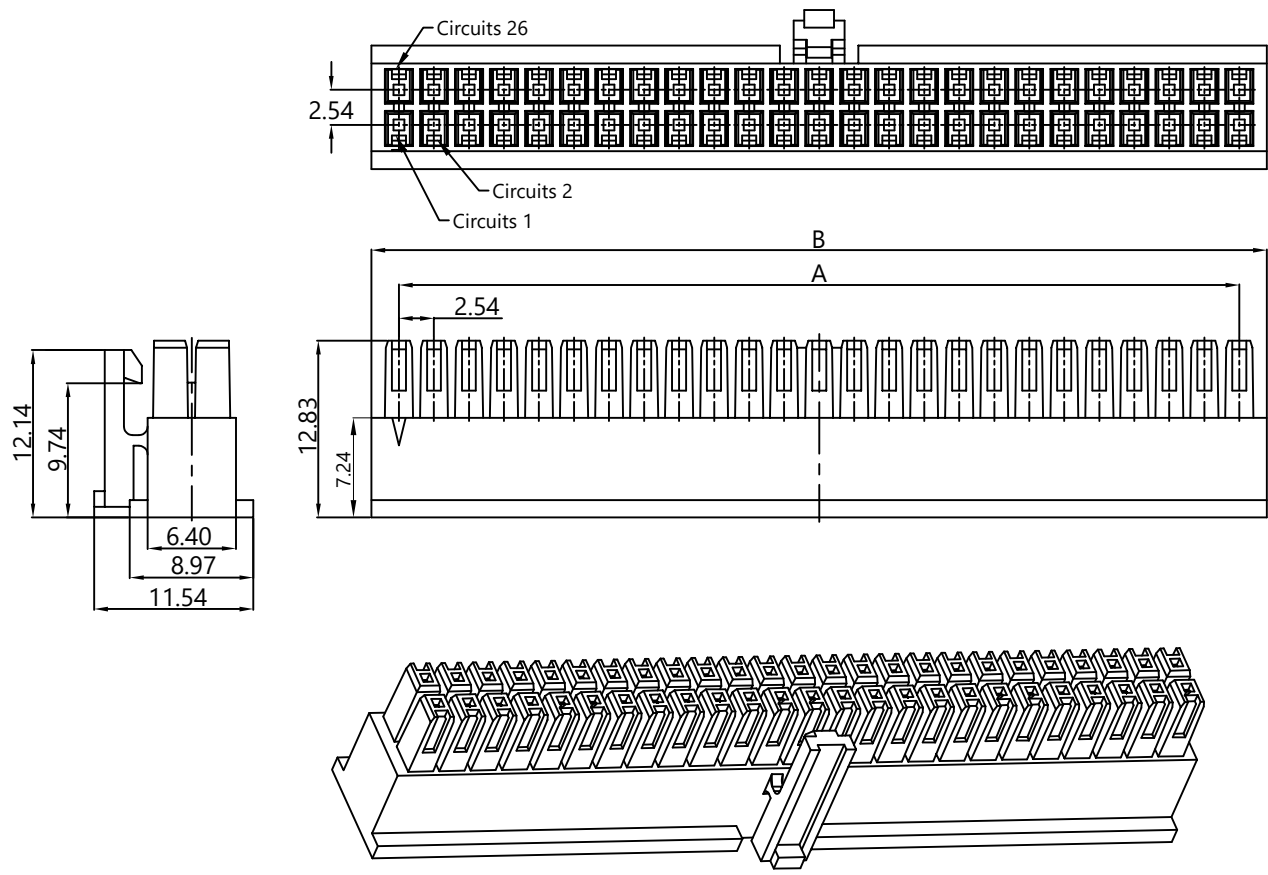

Dimensions		PIN	Dimensions		PIN
A	B		A	B	
2.54	6.50	4	33.02	36.96	28
5.08	9.02	6	35.56	39.50	30
7.62	11.56	8	38.10	42.04	32
10.16	14.10	10	40.64	44.58	34
12.70	16.64	12	43.18	47.12	36
15.24	19.18	14	45.72	49.66	38
17.78	21.72	16	48.26	52.20	40
20.32	24.26	18	50.80	54.74	42
22.86	26.80	20	53.34	57.28	44
25.40	29.34	22	55.88	59.82	46
27.94	31.88	24	58.42	62.36	48
30.48	34.42	26	60.96	64.90	50

		SCONDAR ELECTRONIC LIMITED ENGINEER YAO APPROVED				OPERATION	DRAW	Zhong	2019.06.02	SCALE	-	SCONDAR ELECTRONIC LIMITED
				X.X	±0.35	DESIGN				UNIT	mm	
				X.XX	±0.25		CHECK	Lisa	2019.06.02	SIZE	A4	
AO	2019.06.02	NEW		X.XXX	±0.15		APPROVE	Allen	2019.06.02	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL	PROJ.	TITLE:		SAMTEC 2.54mm 2XXPin with lock Double row Housing PA66 V0 White PE Bag	