

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 1000V AC/DC
- Insulation Resistance: 1000MΩ Min
- Contact resistance: 20mΩ (Max).
- Operation Temperature: -25°C to +85°C


Material:

- Insulator (Housing): Nylon 66 (UL94-V0)
- Color: White

Ordering Information

SCT25414H-XX B 0 WT 173

No. of Pins See Table B = PA66 Package 0=PE Bag Color WT=White

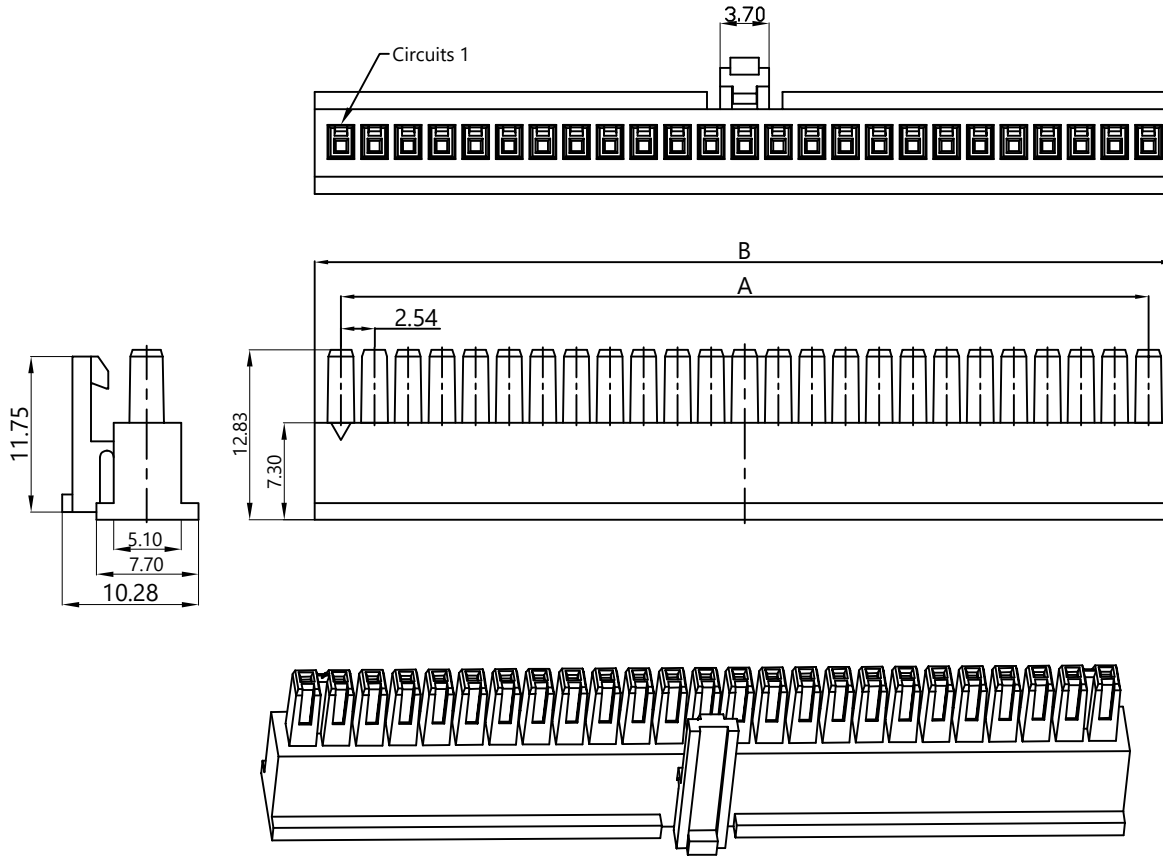

Dimensions		PIN	Dimensions		PIN
A	B		A	B	
2.54	6.50	02	33.02	36.96	14
5.08	9.02	03	35.56	39.50	15
7.62	11.56	04	38.10	42.04	16
10.16	14.10	05	40.64	44.58	17
12.70	16.64	06	43.18	47.12	18
15.24	19.18	07	45.72	49.66	19
17.78	21.72	08	48.26	52.20	20
20.32	24.26	09	50.80	54.74	21
22.86	26.80	10	53.34	57.28	22
25.40	29.34	11	55.88	59.82	23
27.94	31.88	12	58.42	62.36	24
30.48	34.42	13	60.96	64.90	25

SCONDAR ELECTRONIC, LTD
ENGINEER APPD 20240416

OPERATION	DRAW	Zhong	2019.06.02
X.X ±0.35	DESIGN		
X.XX ±0.25			
X.XXX ±0.15	CHECK	Lisa	2019.06.02
Angle ± 3'	APPROVE		
DIM TOL		Allen	2019.06.02

SCONDAR
SCONDAR ELECTRONIC LIMITED

SCALE	-	PART NO.	SCT25414H-XXBWT173
UNIT	mm		
SIZE	A4	TITLE:	SAMTEC 2.54mm XXPin with lock Single row Housing PA66 V0 White Bag
SHEET	1/1		
PROJ.	☯		

AO	2019.06.02	NEW		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE