


RoHS

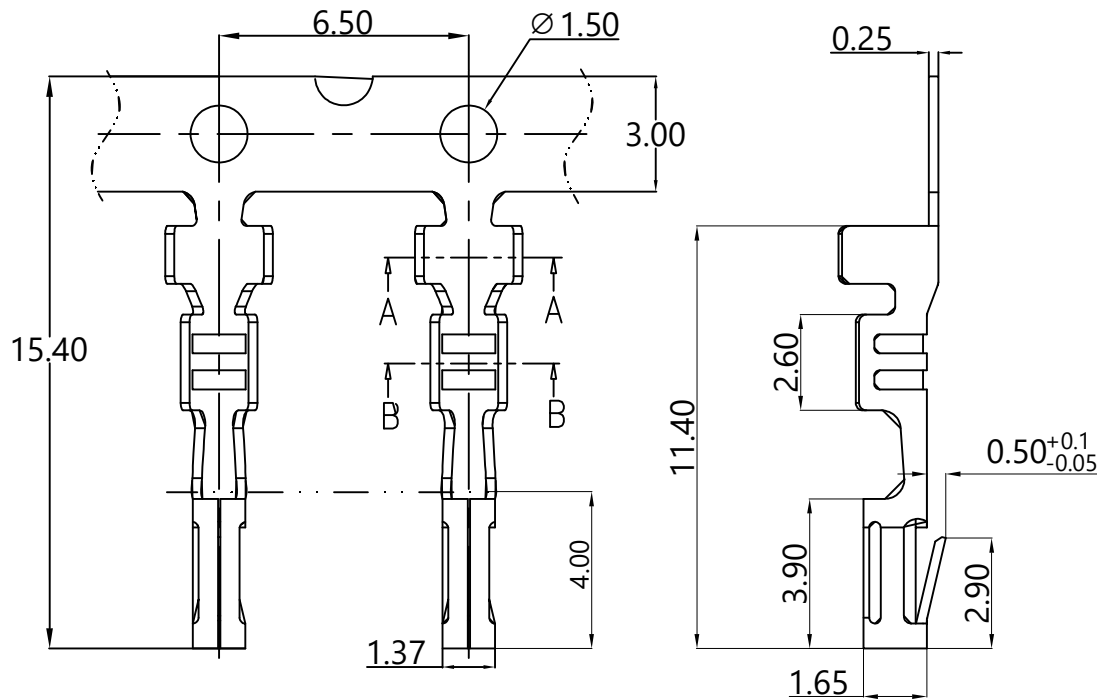

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 1000V AC/DC
- Insulation Resistance: 1000M Ω (Min)
- Contact resistance: 20m Ω Max.
- Operation Temperature: -25°C to +85°C




Material:

- Material: Phosphor bronze
- Finish: Tin Plated
- Applicable Wires: #20AWG~#24AWG
- Insulation O.D: 1.55mm (Max)

Ordering Information

SCT25414T P S 173

Material: P=Phosphor bronze S=Tin Plated



SCONDAR ELECTRONIC LIMITED
ENGINEER YAO APPROVED

					OPERATION	DRAW	YAO	2023.9.13	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X	± 0.35			UNIT	mm		
					X.XX	± 0.25			SIZE	A4		
					X.XXX	± 0.15			SHEET	1/1	PART NO.	SCT25414TPS173
AO	2016.03.03		NEW		Angle	$\pm 3'$			PROJ.		TITLE:	SAMTEC 2.54mm Crimp Terminal for SCT25414H C5191 Tin Plating 24-20AWG Reel MPQ=10KPes
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE				