

RoHS

Specification:

- Current Rating: 4A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C



Material:



- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: Black

Ordering Information

SCT2541FH - 04B3 C BK 134

Insulation C=PA66 V2
Color BK=Black

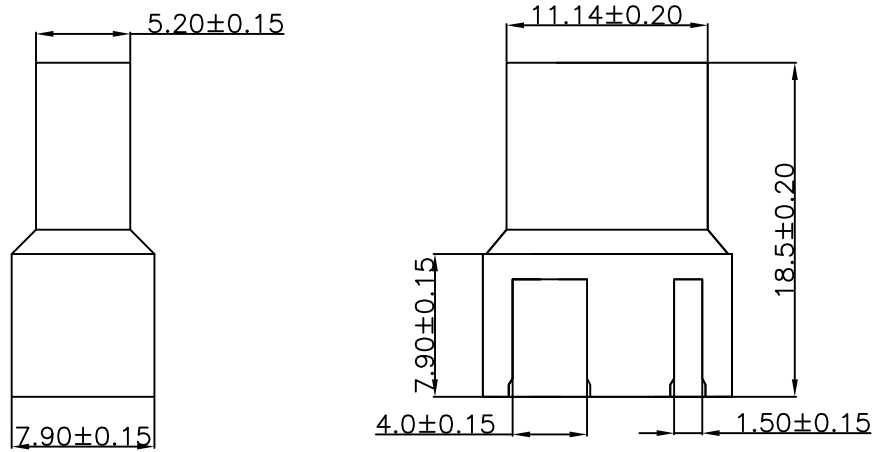

					OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
A1	2021.07.06	Changed from SCT2541FH-4P3B-BK to SCT2541FH-04B3CBK134			X.XX ±0.25		CHECK	Lisa	2021.07.06	SIZE	
AO	2019.10.15	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.06	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3° DIM TOL	APPROVE	Allen	2021.07.06	PROJ.		TITLE: MX2.54 2.54mm Pitch Female Housing Connector