

RoHS

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA66 (UL94V-0)
- Color: Black





Ordering Information

SCT2544FH - xx B BK 112

No. of Pins  
See Table

Insulation  
B=PA66

Color  
BK=Black

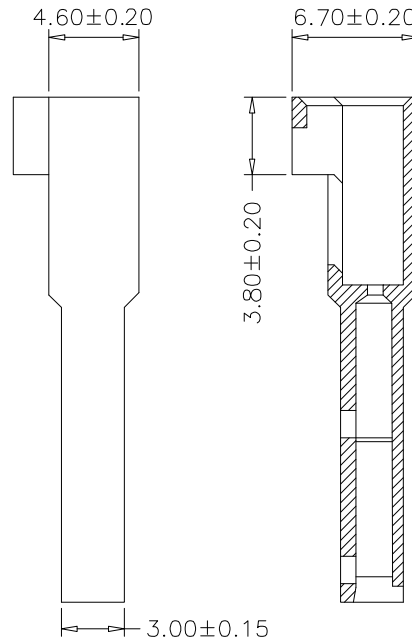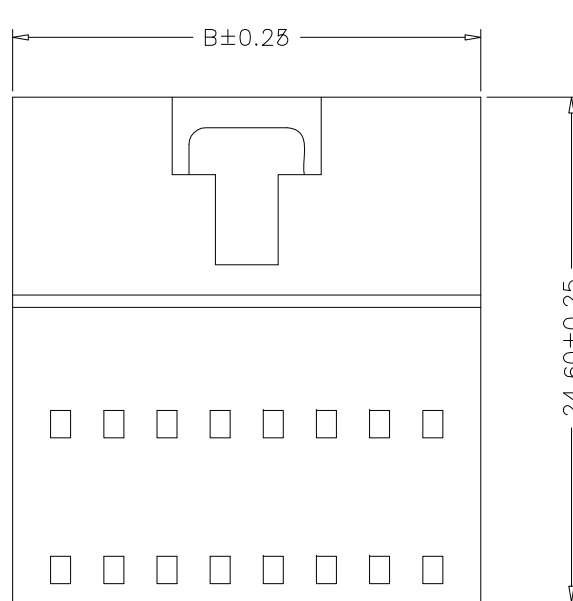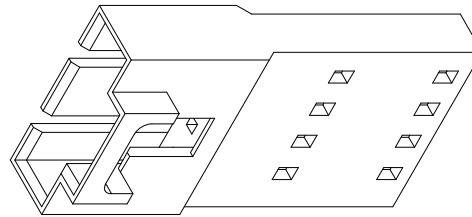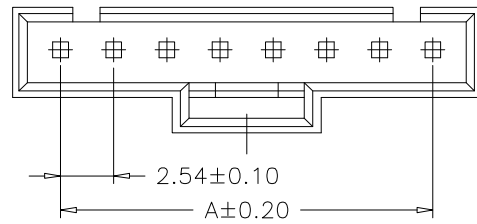

10	22.86	27.43			
9	20.32	24.89			
8	17.78	22.35			
7	15.24	19.81			
6	12.70	17.27	15	33.56	40.13
5	10.16	14.73	14	33.02	37.59
4	7.62	12.19	13	30.48	35.05
3	5.08	9.65	12	27.94	32.51
2	2.54	7.11	11	25.40	29.97
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.09	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.09	Changed from SCT2544FH-xxP to SCT2544FH-xxBBK112			X.X	DESIGN			UNIT	mm	
AO	2019.10.15	NEW			X.XX	CHECK	Lisa	2021.07.09	SIZE	A4	
					X.XXX	APPROVE	Allen	2021.07.09	SHEET	1/1	
					Angle				PART NO.	SCT2544FH-xxBBK112	
					DIM				PROJ.		TITLE: MX2.54 CD-ROM Female Housing Connector