
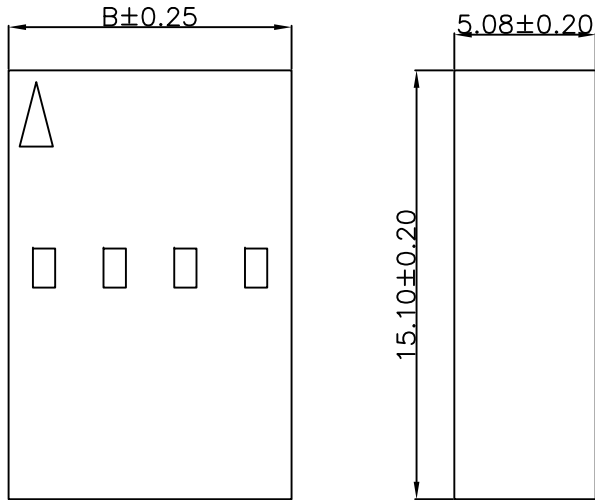


RoHS

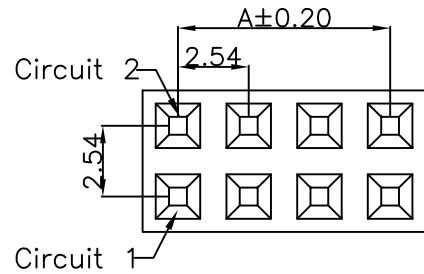

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA66 (UL94V-2)
- Color: Black

Ordering Information

SCT2544MH -2xx C BK 107

No. of Pins  
See Table

Insulation  
C=PA66 V2

Color  
BK=Black

2*32	78.74	81.28
2*31	76.20	78.74
2*30	73.66	76.20
2*4	7.62	10.16
2*3	5.08	7.62
2*2	2.54	5.08
Poles	A	B
	Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.09	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.09	Changed from SCT2544H-2xxP to SCT2544MH-2xxCBK107	_____	_____	X.X	±0.35	_____	_____	UNIT	mm		
AO	2019.10.15	NEW	_____	_____	X.XX	±0.25	_____	_____	SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PROJ.		PART NO.	SCT2544MH-2xxCBK107
					DIM	TOL	APPROVE	Allen	2021.07.09		TITLE:	MX2.54 CD-ROM Male Housing Connector