RoHS

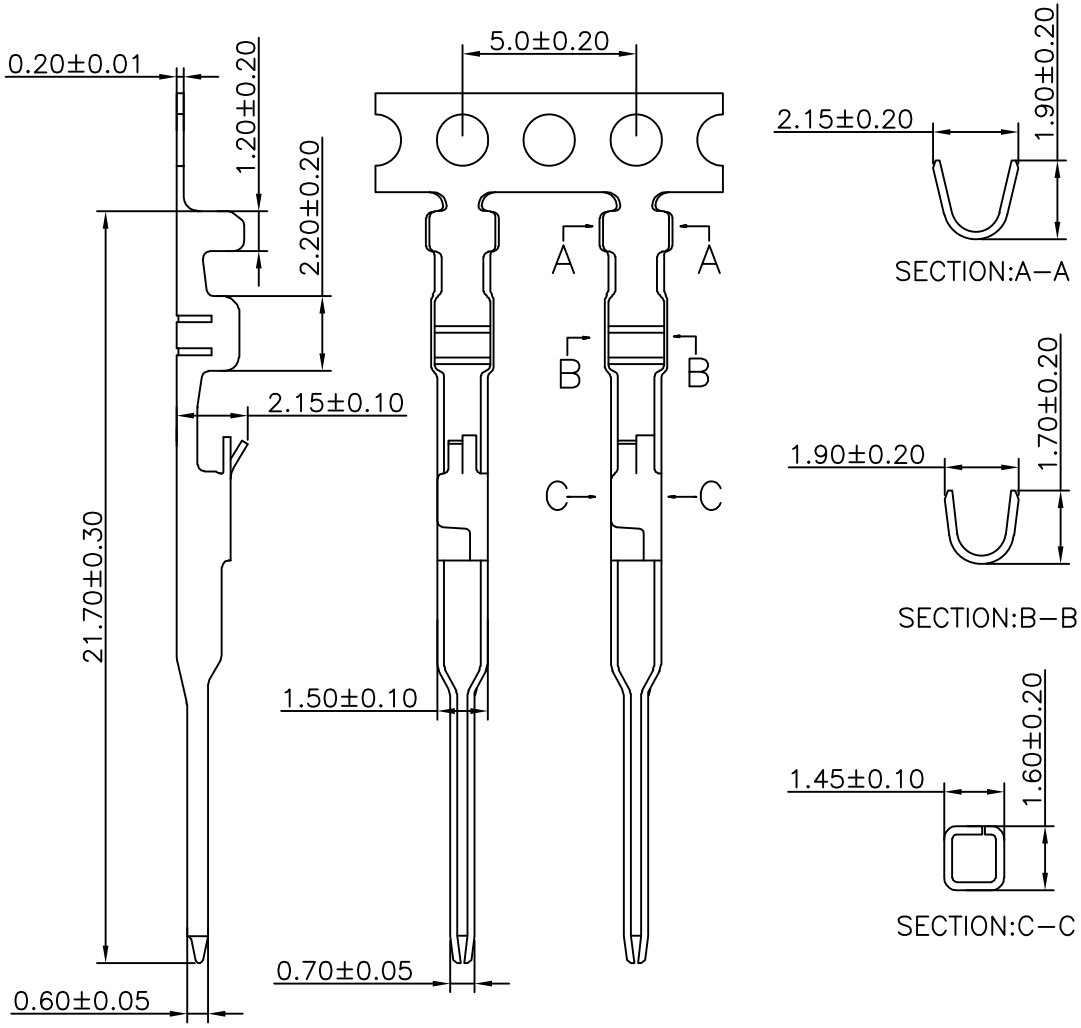

Specification:
-Current Rating: 2A AC/DC
-Voitage Rating: 250V AC/DC
-Insulation Resistance: 1000MΩ(Min)
-Contact resistance: 20mΩ(Max).
-Withstanding Voltage: 500VAC(Min)
-Operation Temperature: -25℃ to +85℃

Material:
-Wire Range:26-28AWG
-Material: Phosphor Bronze, T=0.20mm
-Finish: Tin Plated
-Q'TY: 15,000Pcs/Reel

Ordering Information

SCT2544MT P S 112

Material:
P=Phosphor Bronze

Contact Plated
S=Tin Flash

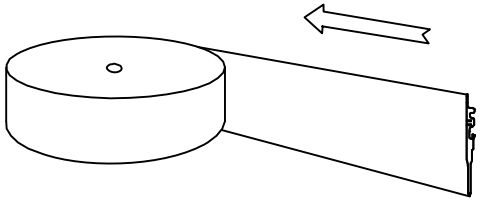

电镀后收料方向示意图
（打线开口朝外）

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A1	2021.07.09	Changed from SCT2544-MTP to SCT2544MTPS112	———	———
A0	2018.03.03	NEW	———	———

OPERATION					
X.X	±0.35	DRAW	Peng	2021.07.09	SCALE –
X.XX	±0.25	DESIGN			UNIT mm
X.XXX	±0.15	CHECK	Lisa	2021.07.09	SIZE A4
Angle	± 3°	APPROVE	Allen	2021.07.09	SHEET 1/1
DIM	TOL				PROJ.

SCONDAR ELECTRONIC LIMITED

PART NO. SCT2544MTPS112 A1

TITLE: MX2.54 CD-ROM Male Terminal