

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC Min
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -40°C to +105°C




Material:

- Insulator (Housing): PA66
- Contacts: Brass
- Solder: Tin Plated
- Color: White

Ordering Information

SCT2545WV - ** B 0 WT 102

No. of Pins See Table
 Insulation B=PA66
 Package 0=PE Bag
 Color WT=White

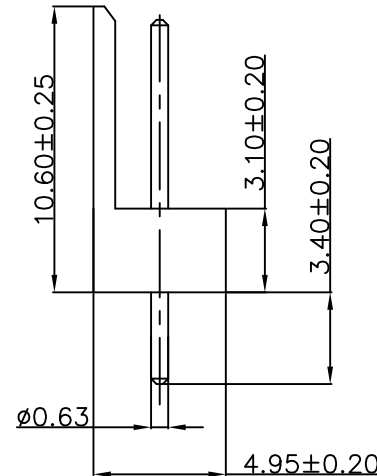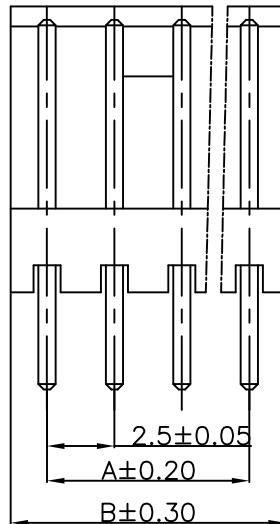

东莞市晟凯达电子科技有限公司
 工程专用章

受控

10	22.86	27.94			
9	20.32	25.40			
8	17.78	22.86			
7	15.24	20.32			
6	12.70	17.78			
5	10.16	15.24			
4	7.62	12.70			
3	5.08	10.16	12	27.94	33.02
2	2.54	7.62	11	25.40	30.48
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

					OPERATION	DRAW	Peng	2021.07.09	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
A1	2021.07.09	Changed from SCT2545WV-xxP to SCT2545WV-xxBOWT102			X.XX ±0.25		CHECK	Lisa	2021.07.09	SIZE	
AO	2019.10.15	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.09	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	DIM	TOL	PROJ.	TITLE:	AMP171822 2.54mm 180° Wafer Connector	