

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000M Ω Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20m Ω (Max).
- Operation Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C

Material:

- Insulator (Housing): PA66 (UL94V-0)
- Color: Black
- Q'TY: 2000PCS/Bag

3D VIEW

Assembly layout





Ordering Information

SCT2546H2 - 03 B BK 110

No.of Pins
03=3Pin

Insulation
B=PA66

Color
BK=Black

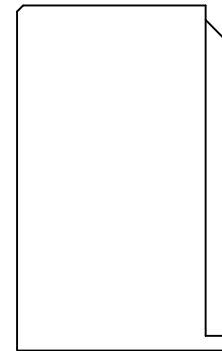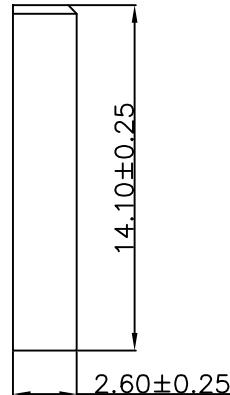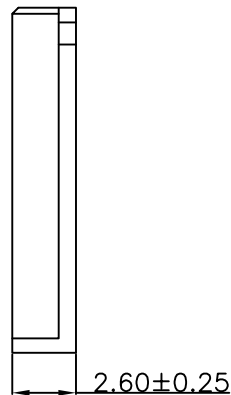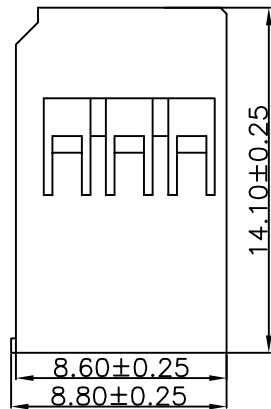

					OPERATION	DRAW	Peng	2019.10.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25				SIZE	A4		
					X.XXX ±0.15	CHECK			SHEET	1/1	PART NO.	SCT2546H2-03BBK110
AO	2019.10.15	NEW			Angle ± 3'	APPROVE			PROJ.		TITLE:	Dupont2.54 3P H2 Housing
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL							