

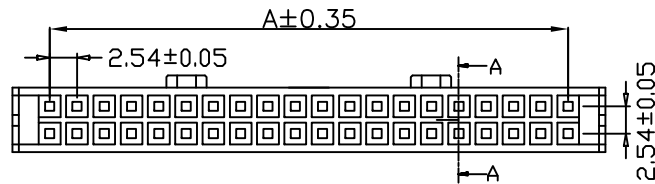
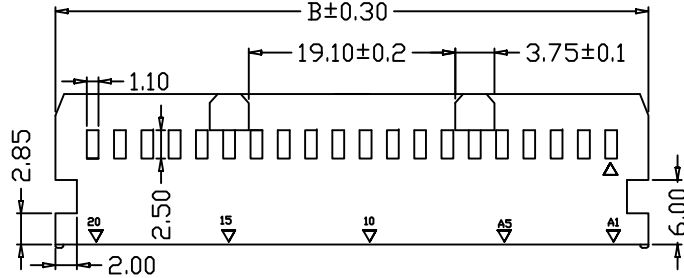


RoHS

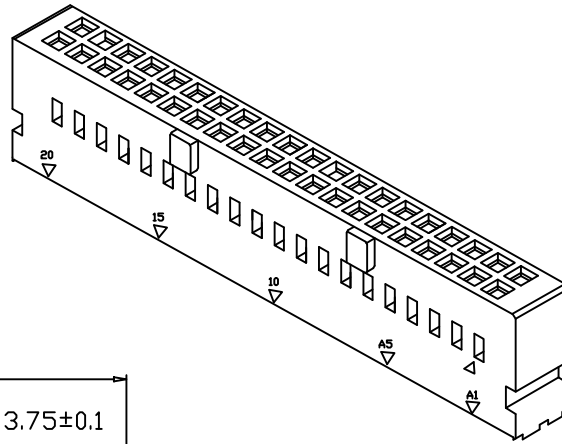

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20mΩ(Max)
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PBT/PA66 (UL94V-0)
- Color: Black

Ordering Information

SCT2549HB -2 xx x BK 107

No. of Pins See Table  
 Insulation B=PA66 D=PBT  
 Color BK=Black

2x29	71.12	78.06			
2x28	68.58	75.52			
2x27	66.04	72.98			
2x26	63.50	70.44			
2x25	60.96	67.90			
2x24	58.42	65.36			
2x23	55.88	62.82			
2x22	53.34	60.28	2x32	78.74	85.68
2x21	50.08	57.74	2x31	76.20	83.14
2x20	48.26	55.20	2x30	73.66	80.60
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.10	Changed from SCT2549HB-2xxP to SCT2549HB-2xxxBK107			X.X	±0.35			UNIT	mm	
AO	2019.10.15	NEW			X.XX	±0.25	Lisa	2021.07.10	SIZE	A4	
					X.XXX	±0.15	Allen	2021.07.10	SHEET	1/1	
					Angle	± 3'			PART NO.	SCT2549HB-2xxxBK107	
					DIM	TOL			PROJ.		TITLE: HRS 2.54 双凸 Housing