


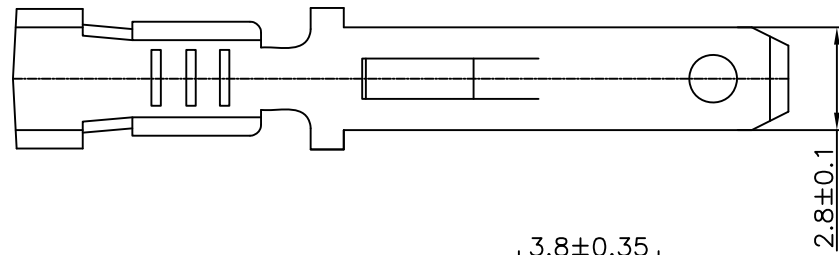


RoHS

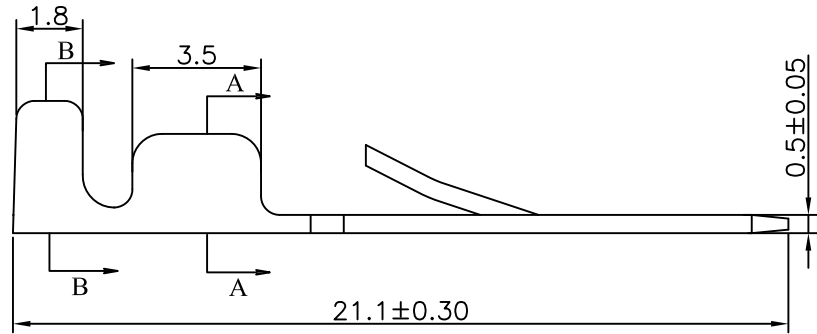

SECTION:A-A



SECTION:B-B

Specification:

- Current Rating: 8A AC/DC
- Voltage Rating: 300V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1000VAC(Min)
- Operation Temperature: -25°C to +85°C


Material:

- Wire Range:18~22AWG
- Material: Phosphor Bronze
- Finish: Tin Plated

Ordering Information

SCT28050MT P S 102

Material: P=Phosphor Bronze S=Tin Flash
Contact Plated

					OPERATION	DRAW	Peng	2021.07.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X ±0.35	DESIGN			UNIT	mm			
A1	2021.07.12	Changed from SCT28050-MT to SCT28050MTPS102			X.XX ±0.25		CHECK	Lisa	2021.07.12	SIZE		A4	
AO	2018.03.03	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.12	SHEET	1/1		PART NO.	SCT28050MTPS102
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL	PROJ.	⊕	TITLE:	28050 Male Terminal			