



RoHS

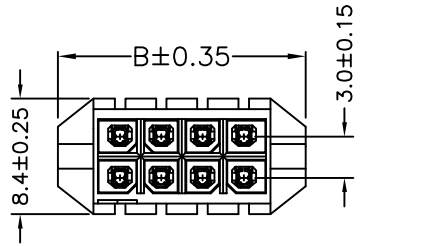

Specification:

- Current Rating: 5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC Min
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C




Material:

- Insulator (Housing): LCP (UL94V-0)
- PIN:Phosphor Bronze/Tin-Plated
- Solder: Tin Plated
- Color: Black

Ordering Information

SCT3001MWV- 2xx F 0 BK 103

No. of Pins See Table Insulation F=LCP Package 0=Bag Color BK=Black

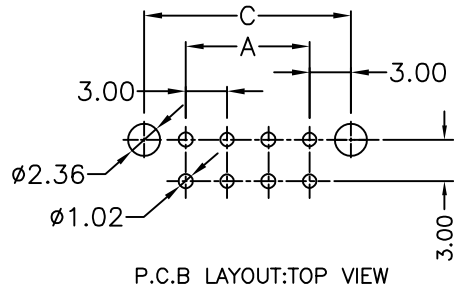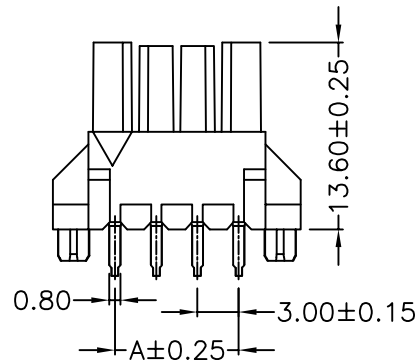

Poles	Dimensions(mm)		
	A	B	C
2*02	3.00	12.00	9.00
2*03	6.00	15.00	12.00
2*04	9.00	18.00	15.00
2*05	12.00	21.00	18.00
2*06	15.00	24.00	21.00
2*07	18.00	27.00	24.00
2*08	21.00	30.00	27.00
2*09	24.00	33.00	30.00
2*10	27.00	36.00	33.00
2*11	30.00	39.00	36.00
2*12	33.00	42.00	39.00

SCONDAR ELECTRONIC, LTD
ENGINEER XJ2411

OPERATION	DRAW	Xiong	2024.05.05	SCALE	-
X.X ±0.35	DESIGN			UNIT	mm
X.XX ±0.25	CHECK	Lisa	2024.05.05	SIZE	A4
X.XXX ±0.15	APPROVE			SHEET	1/2
Angle ± 3'				PROJ.	⌀
DIM TOL				TITLE:	


SCONDAR
SCONDAR ELECTRONIC LIMITED

A0	2024.05.05	NEW																	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE															


PART NO. SCT3001MWV-2xxFOBK103
TITLE: MX3.0 LCP V0 Black 2xxP DIP Male WV Socket
There are Positioning column Bag

RoHS


2*02




2*03




2*04




2*05




2*06




2*07

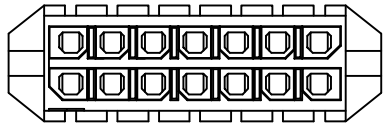


2*08

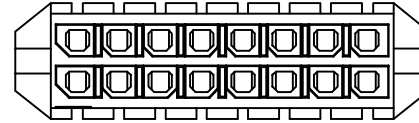


2*09

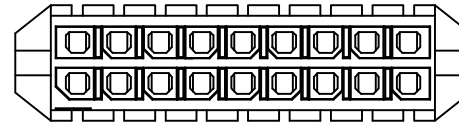


2*10

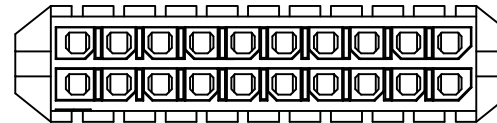



2*11

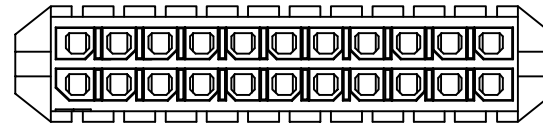

2*12

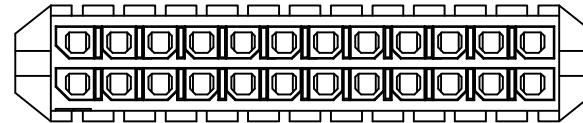

						OPERATION	DRAW	Xiong	2024.05.05	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X ±0.35	DESIGN			UNIT	mm		
						X.XX ±0.25	CHECK	Lisa	2024.05.05	SIZE	A4		
A0	2024.05.05	NEW	---	---		X.XXX ±0.15	APPROVE			SHEET	2/2		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		Angle ± 3'				PROJ.		TITLE:	MX3.0 LCP V0 Black 2xxP DIP Male WV Socket There are Positioning column Bag
						DIM TOL							