


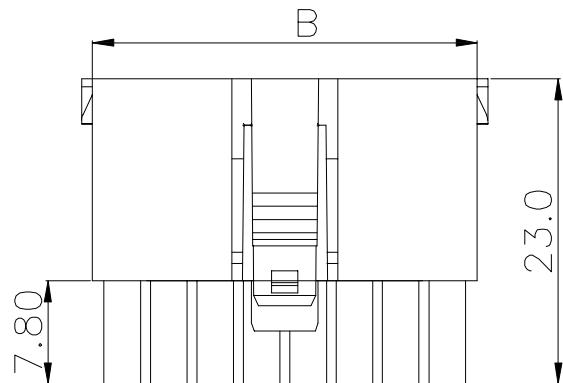





RoHS

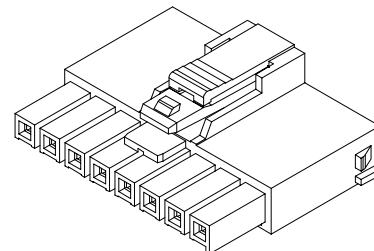

KEY A

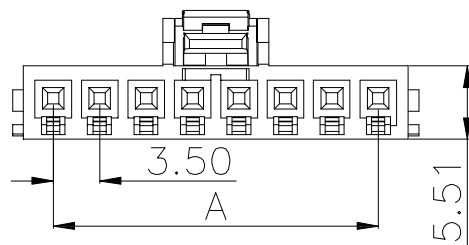

KEY B

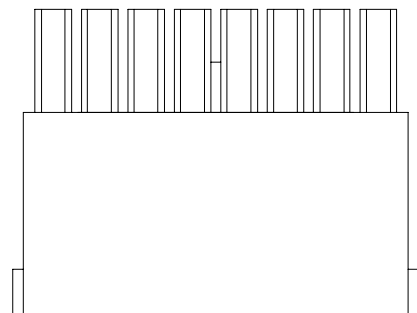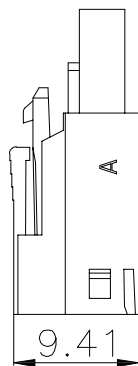

东莞市晟凯达电子科技有限公司
工程专用章

受控

Specification:

- Current Rating: 14A AC/DC
 - Voltage Rating: 400V AC/DC
 - Insulation Resistance: 100M Ω Min
 - Withstanding Voltage: 1800VAC(1Min)
 - Contact resistance: 10m Ω (Max).
 - Operation Temperature: -40 $^{\circ}$ C to +105 $^{\circ}$ C
- Material:
- Insulator (Housing): Nyion 4T (UL94V-0)
 - Color: Black/Natural

Ordering Information

SCT3501MH xx - xx K BK 173

PROTRUSIONS
KA=KEY A
KB=KEY B

No.of Pins
See Table

Insulation
K=PA4T V0

Color
BK=Black
NA=Natural

Dimensions		Part NO	PIN
A	B		
3.50	8.00	SCT3501MHxx-02KBK173	2
7.00	11.50	SCT3501MHxx-03KBK173	3
10.50	15.00	SCT3501MHxx-04KBK173	4
14.00	18.50	SCT3501MHxx-05KBK173	5
17.50	22.00	SCT3501MHxx-06KBK173	6
21.00	25.50	SCT3501MHxx-07KBK173	7
24.50	29.00	SCT3501MHxx-08KBK173	8

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		DRAW	ZUO	2017.07.8	SCALE	—		Part No.	TITLE:	3.50mm Pitch Wire to Board Male Housing xxPin Circuits PA4T V0 Black MPQ=0.5KPs
					X.X	± 0.30									
A0	2017.07.8	NEW	—	—	X.XX	± 0.20	DESIGN				UNIT	mm			
					X.XXX	± 0.10	CHECK	ZHONG	2017.07.8		SIZE	A4			
					Angle	$\pm 3^{\circ}$					SHEET	1/1			
					DIM	TOL	APPROVE	Lisa	2017.07.8		PROJ.				



SCONDAR ELECTRONIC LIMITED