

RoHS

Specification:

- Current Rating: 5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C




Material:

- Insulator (Housing): PA66 (UL94V-0)
- Color: Natural



Ordering Information

SCT3700FH - ** B NA 102

No. of Pins See Table
 Insulation B=PA66
 Color NA=Natural

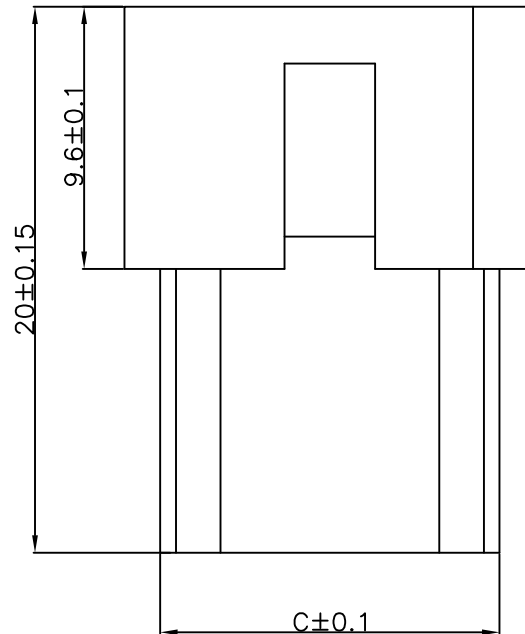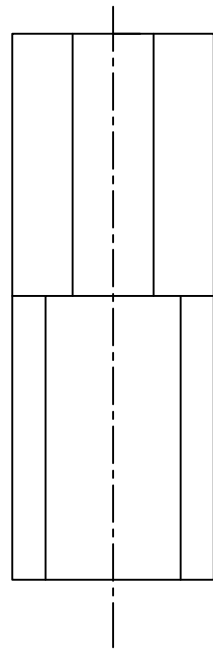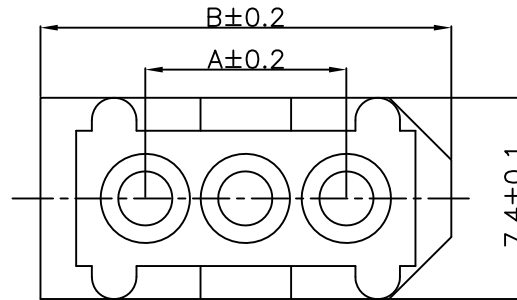

3	7.4	15.1	12.4
2	3.7	11.4	8.7
Poles	A	B	C
	Dimensions		

						OPERATION	DRAW	Peng	2021.07.09	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X	±0.35			UNIT	mm		
A1	2021.07.09	Changed from SCT3700FH-xxP to SCT3700FH-xxBNA102				X.XX	±0.25			SIZE	A4		
AO	2019.10.15	NEW				X.XXX	±0.15	Lisa	2021.07.09	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle	± 3'	Allen	2021.07.09	PROJ.		TITLE:	1.58 Female Housing Connector
						DIM	TOL						