
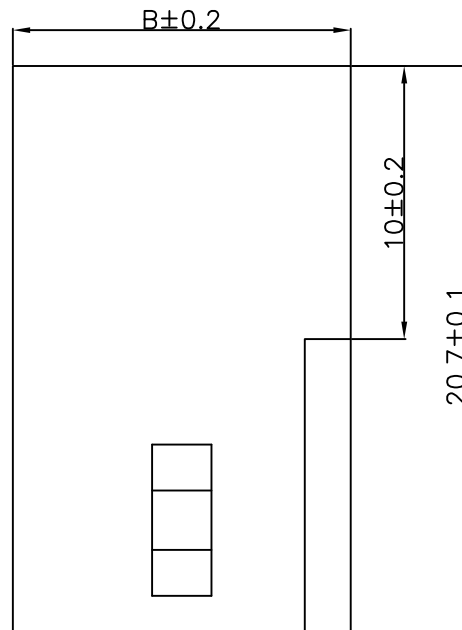
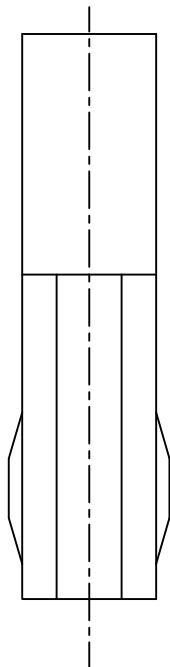


RoHS

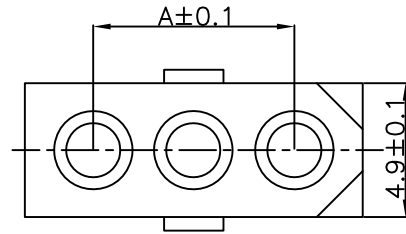

Specification:

- Current Rating: 5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:



- Insulator (Housing): PA66 (UL94V-0)
- Color: Natural

Ordering Information

SCT3700MH - ** B NA 102

No. of Pins See Table Insulation B=PA66 Color NA=Natural

3	7.4	12.4
2	3.7	8.7
Poles	A	B
	Dimensions	

					OPERATION	DRAW	Peng	2021.07.09	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X ±0.35	DESIGN			UNIT	mm	
A1	2021.07.09	Changed from SCT3700MH-xxP to SCT3700MH-xxBNA102			X.XX ±0.25		CHECK	Lisa	2021.07.09	SIZE	
AO	2019.10.15	NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.09	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	DIM	TOL	PROJ.		TITLE:	1.58 Male Housing Connector