RoHS

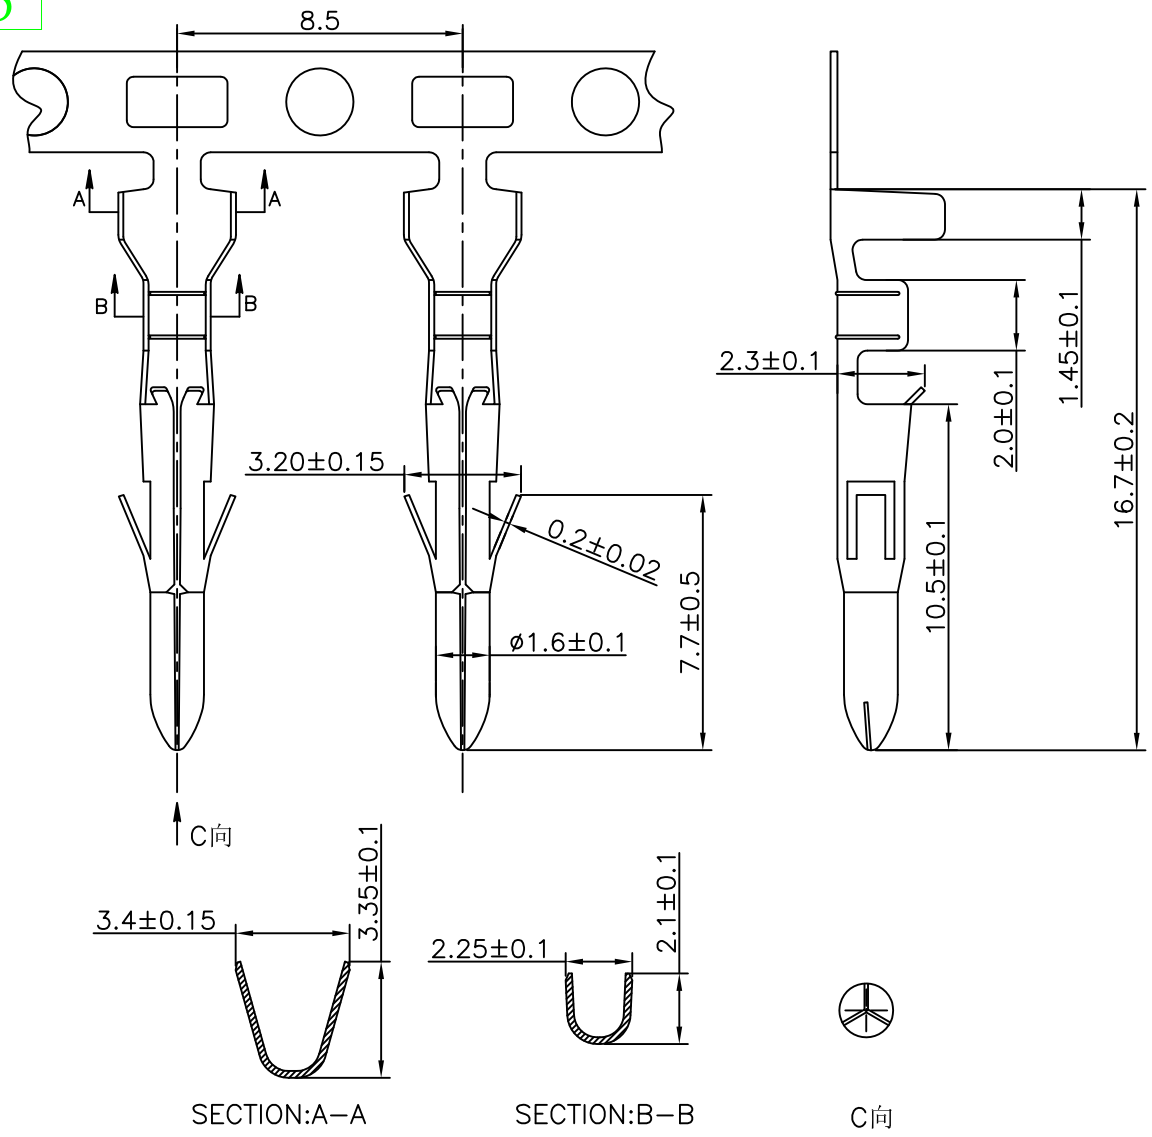

Specification:
-Current Rating: 5A AC/DC
-Voitage Rating: 250V AC/DC
-Insulation Resistance: 1000MΩ Min
-Withstanding Voltage: 1500VAC(1Min)
-Contact resistance: 20mΩ(Max).
-Operation Temperature: -25℃ to +85℃

Material:
-Wire Range:18-26AWG(OD:2.5mm)
-Material: Phosphor Bronze
-Finish: Tin Plated

Ordering Information

SCT3700MT P S 102

Material: P=Phosphor Bronze
Contact Plated S=Tin Flash

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE
A1	2021.07.09	Changed from SCT3700-MTP to SCT3700MTPS102	———	———
A0	2018.03.03	NEW	———	———

OPERATION				
X.X	±0.35	DRAW	Peng	2021.07.09
X.XX	±0.25	DESIGN		
X.XXX	±0.15	CHECK	Lisa	2021.07.09
Angle	± 3°	APPROVE	Allen	2021.07.09
DIM	TOL			

SCALE	–
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

SCONDAR ELECTRONIC LIMITED

PART NO.	SCT3700MTPS102 A1
TITLE:	1.58 Male Terminal