


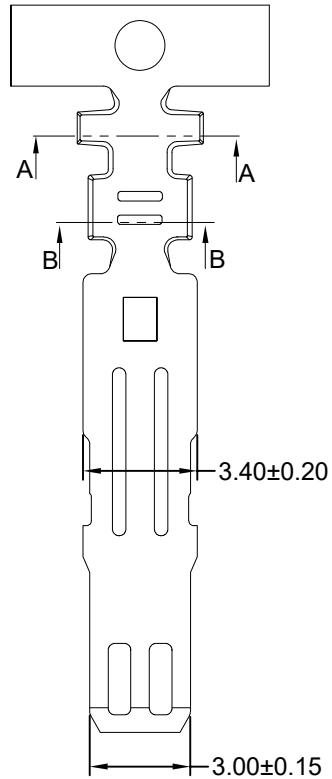


RoHS

受控

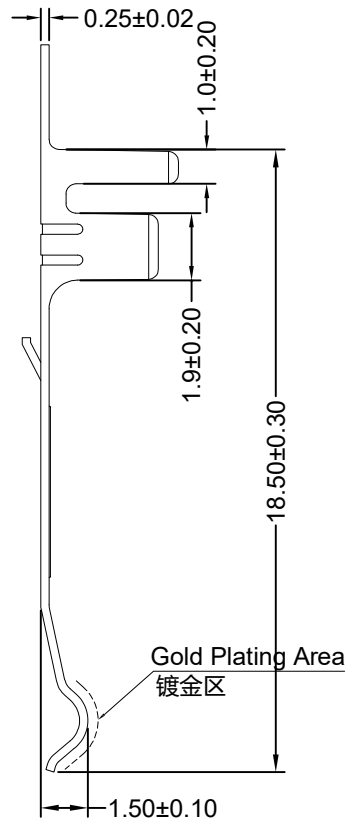

SEC A-A



SEC B-B

Specification:

- Current Rating: 1.5A AC/DC
- Voltage Rating: 30V AC/DC
- Insulation Resistance: 500MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 30mΩ(Max).
- Operation Temperature: -25℃ to +85℃

Material:

- Material: Phosphor Bronze
- Finish: Half Gold Plated(Nickel Base 20U" or More, Tin Plated 80U" or more, Gold Plated 1U" or More)
- Applicable Wires: 16AWG(OD2.4mm); 18AWG+20AWG(OD2.1+1.85mm)

Ordering Information

SCT3801 T P HG 134

Material:
P=Phosphor BronzeContact Plated
S=Tin Plated
G=Gold Plated
HG=Half GoldSCONDAR ELECTRONIC, LTD
ENGINEER ZSUS

OPERATION	
X.X	±0.35
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	Yao	2021.10.08
DESIGN	Xiong	2021.10.08
CHECK	Lisa	2021.10.10
APPROVE		

SCALE	-
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	☞

PART NO.	SCT3801TPHG134
TITLE:	SATA-15P 3.81mm Phosphor Bronze Half Gold Plated Terminal 16AWG or 18AWG+20AWG MPQ=5KPcs/Reel

SCONDAR

SCONDAR ELECTRONIC LIMITED