

RoHS

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PA66 (UL94V-2)
- Color: Nature

Ordering Information

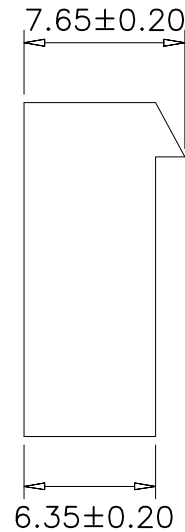
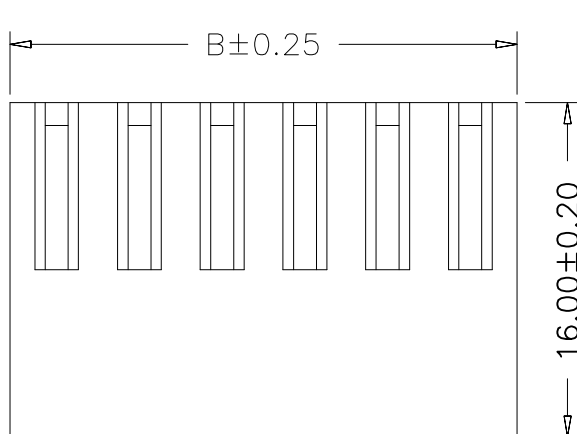
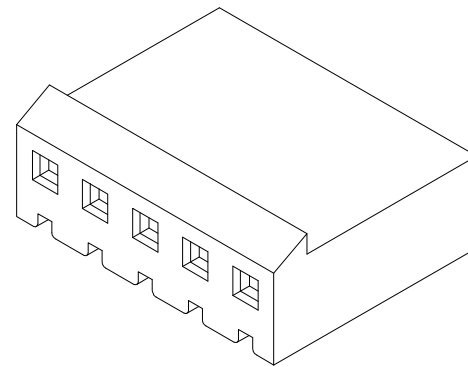
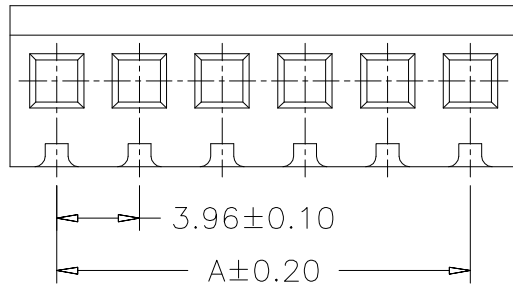
SCT3960H - xx C NA 119




No. of Pins  
See Table

Insulation  
C=PA66 V2

Color  
NA=Nature

11	39.60	44.07			
10	35.64	40.11	20	75.24	79.71
9	31.68	36.15	19	71.28	75.75
8	27.72	32.19	18	67.32	71.79
7	23.76	28.23	17	63.36	67.83
6	19.80	24.27	16	59.40	63.87
5	15.84	20.31	15	55.44	59.91
4	11.88	16.35	14	51.48	55.95
3	7.92	12.39	13	47.52	51.99
2	3.96	8.43	12	43.56	48.03
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED			
A1	2021.07.10	Changed from SCT3960H-xxP to SCT3960H-xxCNA119			X.X	±0.35			UNIT	mm				
AO	2019.10.15	NEW			X.XX	±0.25	Lisa	2021.07.10	SIZE	A4				
					X.XXX	±0.15	Allen	2021.07.10	SHEET	1/1	PART NO.	SCT3960H-xxCNA119		
					Angle	± 3'			PROJ.		TITLE:	MX3.96 Housing Connector		