
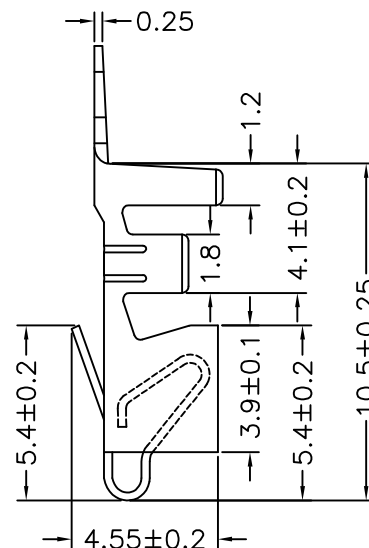


受控

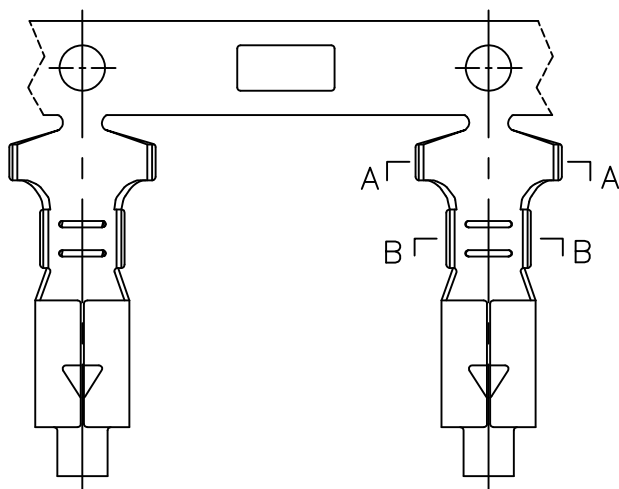

- Current Rating: 7.5A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25℃ to +85℃



- Material: Phosphor Bronze T=0.25mm
- Finish: Tin Plated
- Applicable Wires: 18AWG~22AWG

Ordering Information


SCT3961 FT P S 190

Material
P=Phosphor Bronze

Contact Plated
S= Tin Flash



SEC:A-A



SEC:B-B

					OPERATION		DRAW	Yao	2022.07.06	SCALE	—	 SCONDAR ELECTRONIC LIMITED		
		SCONDAR ELECTRONIC, LTD ENGINEER 2505			X.X	±0.35	DESIGN	Xiong	2022.07.06	UNIT	mm			
			X.XX	±0.25	SIZE	A4								
A0	2022.07.06		NEW	——	——	X.XXX	±0.15	CHECK	Lisa	2022.07.08	SHEET			1/1
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3' TOL	APPROVE			PROJ.		TITLE:	VH 3.96mm Phosphor Bronze Tin Plated Female Terminal 18—22AWG MPQ=0.3KPCS/Reel