

RoHS

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: Natural





Ordering Information

SCT3962H - xx C NA 115

No. of Pins  
See Table

Insulation  
C=PA66 V2

Color  
NA=Natural

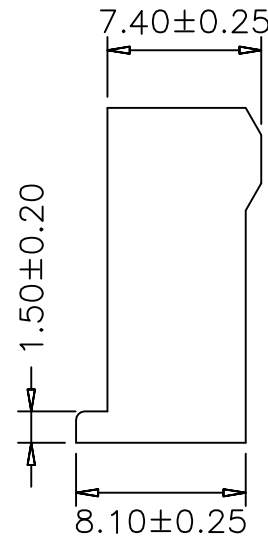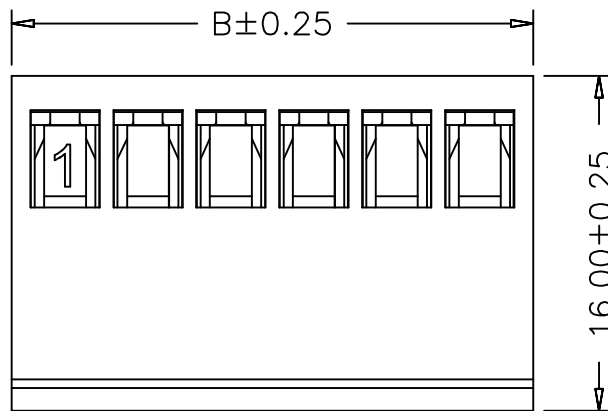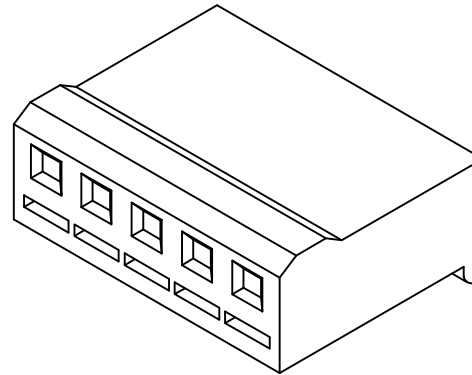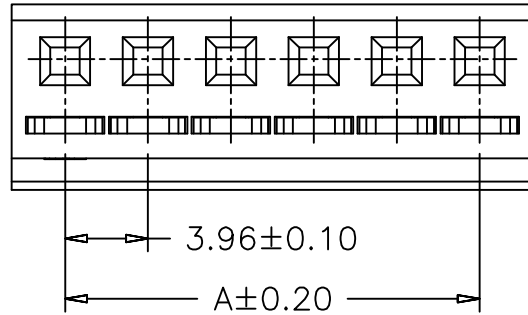

东莞市晟凯达电子科技有限公司  
工程专用章

受控

11	39.60	44.70			
10	35.64	40.74			
9	31.68	36.78			
8	27.72	32.82			
7	23.76	28.86			
6	19.80	24.90			
5	15.84	20.94			
4	11.88	16.98			
3	7.92	13.02			
2	3.96	9.06	12	43.56	48.66
Poles	A		Poles	B	
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.10	Changed from SCT3962H-xxPC to SCT3962H-xxCNA115			X.X	±0.35			UNIT	mm	
AO	2019.10.15	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
					Angle	± 3'			PART NO.	SCT3962H-xxCNA115	
					DIM	TOL			PROJ.	MX5195 Housing Connector	