

RoHS

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 600V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 UL94V-0 or UL94V-2
- Color: White/Natural

Ordering Information

SCT4201FNA - \*\* \* \*\* 103

No.of Pins  
02-06Pin


Insulation  
B=PA66 V0  
C=PA66 V2

Color  
WT=White  
NA=Natural




东莞市赛凯达电子科技有限公司  
工程专用章

受控

6	21.00	26.60
5	16.80	22.40
4	12.60	18.20
3	8.40	14.00
2	4.20	9.80
Poles	A	B
	Dimensions	

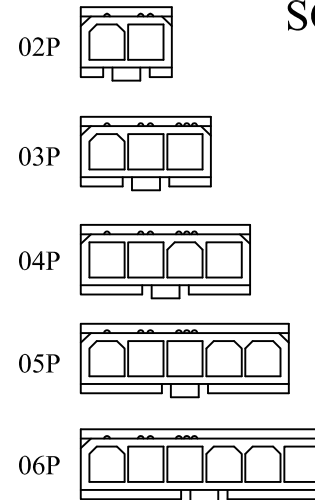

CIRCUIT SIZE LAYOUT

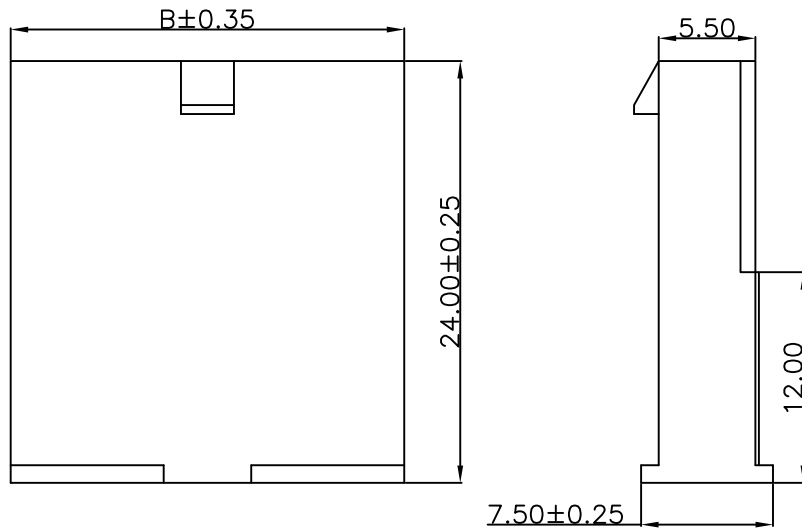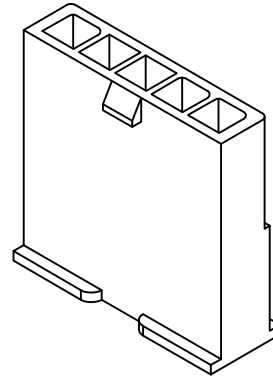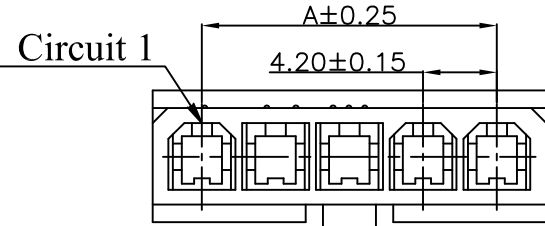

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
A1	2021.07.10	Changed from SCT4201FHA-xxP to SCT4201FNA-xxxxx103			X.XX ±0.25				SIZE	A4		
AO	2006.05.02	NEW			X.XXX ±0.15	CHECK	Lsia	2021.07.10	SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	APPROVE	Allen	2021.07.10	PROJ.		TITLE:	MX 4.20mm Pitch 无翅 Female Housing Connector