
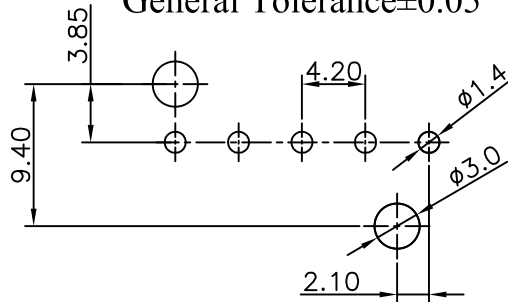


RoHS

Recommended P.C.B Layout  
General Tolerance±0.05

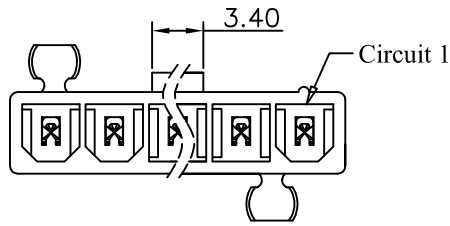

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 600V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1500VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:

- Insulator Material: PA66(UL94V-0/2)
- Contact Material: Brass
- Finish: Tin Plated or Gold Flash
- Color: Natural

Ordering Information




SCT4201WVAF- xx x 0 NA 103

No. of Pins  
See Table

Material  
B=PA66 V0  
C=PA66 V2

Package  
0=PE Bag

Color  
NA=Natural

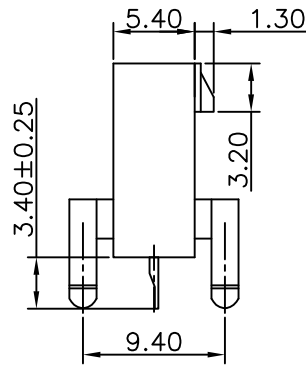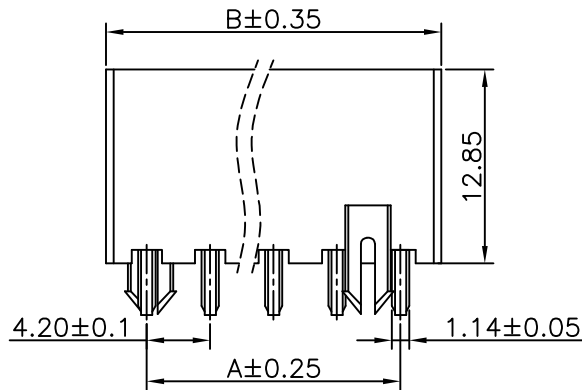

东莞市晟凯达电子科技有限公司  
工程专用章

受控

6	21.00	26.40
5	16.80	22.20
4	12.60	18.00
3	8.40	13.80
Poles	A	B
	Dimensions	

					OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2021.07.10	SIZE		A4
AO	2020.03.03		NEW		X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1		PART NO.
REV	DATE		MODIFICATION DESCRIPTION	CHANGE	APPROVE				PROJ.	☞	TITLE:	MX4.2 180° Wafer