


RoHS



Specification:

- Current Rating: 10A AC/DC
- Voltage Rating: 300V AC/DC
- Insulation Resistance: 1000M Ω (Min)
- Contact resistance: 0.01 Ω (Max).
- Withstanding Voltage: 1500VAC(Min)
- Operation Temperature: -25 $^{\circ}$ C to +85 $^{\circ}$ C

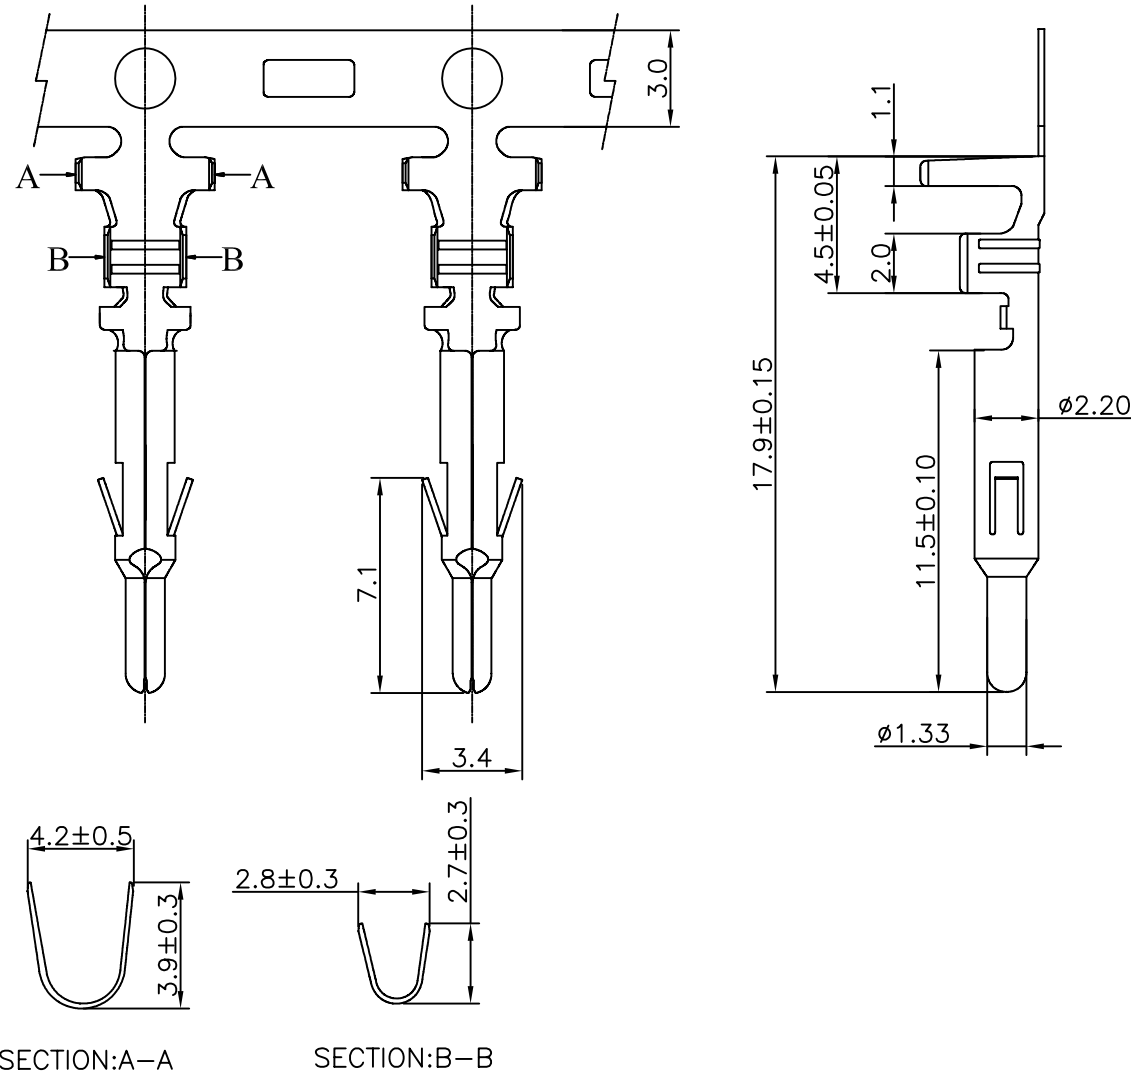

Material:

- Wire Range:24~16AWG
- Material: Phosphor Bronze, T=0.20mm
- Finish: Tin Plated
- Q'TY: 5000PCS/Reel

Ordering Information

SCT4500MT P S 102

Material:
P=Phosphor Bronze
S=Tin Flash

						OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X	±0.35			UNIT	mm		
						X.XX	±0.25			SIZE	A4		
						X.XXX	±0.15			SHEET	1/1		
A1	2021.07.10	Changed from SCT4500-MT to SCT4500MTPS102				Angle	± 3'			PART NO.	SCT4500MTPS102		
AO	2018.03.03	NEW				DIM	TOL	APPROVE	Allen	2021.07.10	PROJ.		TITLE: