

RoHS

Specification:

- Current Rating: 12A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C
- Contact resistance: 20mΩ(Max)

Material:

- Insulator (Housing): ABS
- Color: Natural


**Ordering Information**



SCT63090MH - 02 L NA 102

No.of Pins  
02-03Pin

Insulation  
L=ABS

Color  
NA=Natural

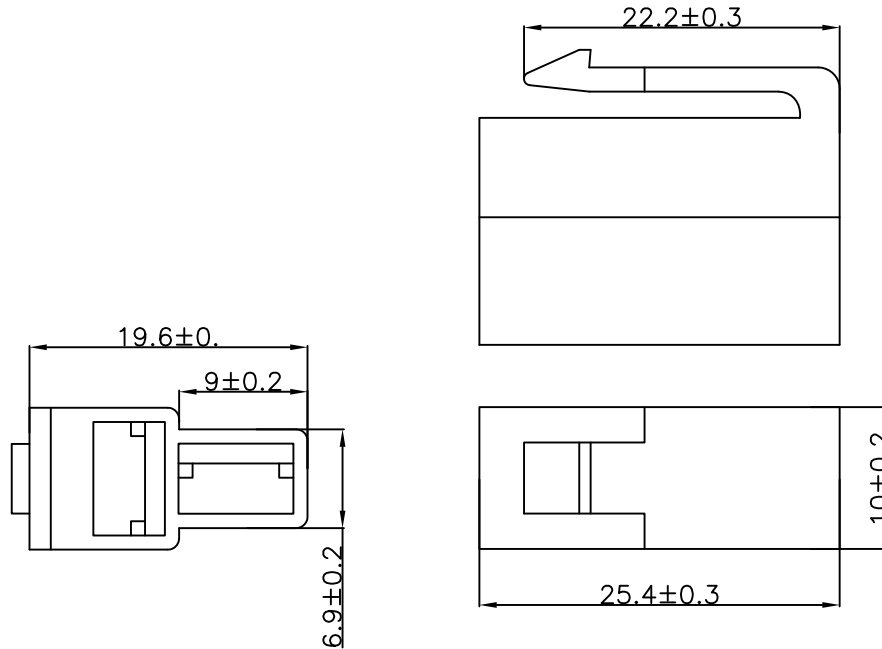

					OPERATION	DRAW	Peng	2006.05.02	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
					X.X	±0.35			UNIT	mm			
A1	2021.07.12	Changed from SCT63090MH-02P to SCT63090MH-02LNA102			X.XX	±0.25			SIZE	A4			
AO	2006.05.02	NEW			X.XXX	±0.15		2006.05.02	SHEET	1/1		PART NO.	SCT63090MH-02LNA102
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PROJ.		TITLE:	63090 Male Housing Connector	
					DIM	TOL	APPROVE	Allen	2006.05.02				