
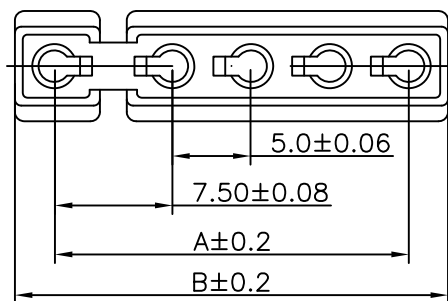
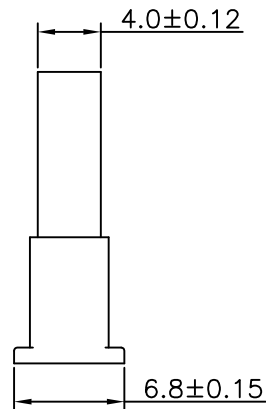
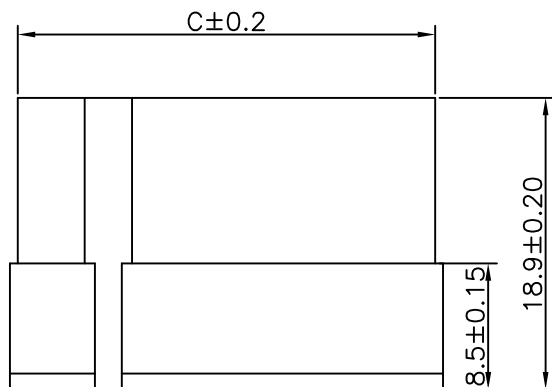


RoHS

Recommended P.C.B Layout
General Tolerance±0.05

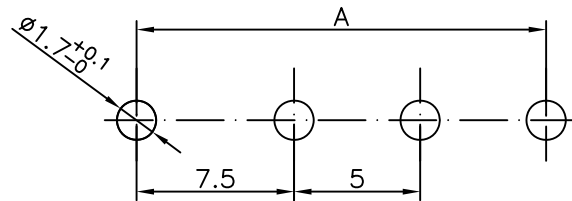

Specification:

- Current Rating: 7A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ(Min)
- Contact resistance: 20mΩ(Max).
- Withstanding Voltage: 1500VAC(Min)
- Operation Temperature: -25°C to +85°C

Material:

- Insulator Material: Nylon 66(UL94V-2)
- Color: White
- Q'TY: 1,000PCS/Bag

Ordering Information

SCT7501H- ** C 0 WT 115

No. of Pins See Table
Material C=PA66 V2
Package 0=PE Bag
Color WT=White

6	27.50	32.30	31.50
5	22.50	27.30	26.50
4	17.50	22.30	21.30
3	12.50	17.30	16.50
2	7.50	12.30	11.50
Poles	A	B	C
	Dimensions		

					OPERATION	DRAW	Peng	2021.07.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED			
					X.X	±0.35			UNIT	mm				
A1	2021.07.12	Changed from SCT7501H-xxP to SCT7501H-xxCOWT115			X.XX	±0.25			SIZE	A4				
AO	2020.03.03	NEW			X.XXX	±0.15	Lisa	2021.07.12	SHEET	1/1		PART NO.	SCT7501H-xxCOWT115	⚠
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	Angle DIM	± 3' TOL	APPROVE	Allen	2021.07.12	PROJ.	⊕	TITLE:	TJC2 7.5mm Housing