
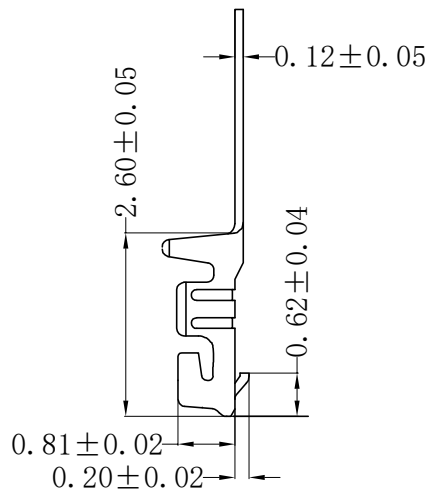


RoHS

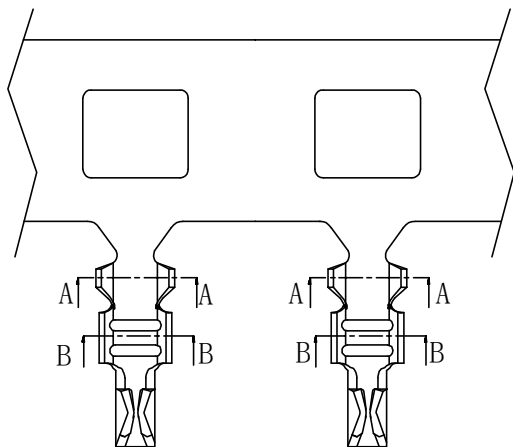


Specification:


- Current Rating: 0.5A AC/DC
  - Voltage Rating: 30V AC/DC
  - Insulation Resistance: 100MΩ Min
  - Withstanding Voltage: 200VAC(1Min)
  - Contact resistance: 20mΩ(Max).
  - Operation Temperature: -25°C to +85°C
- Material:
- Applicable Wire: AWG#28-32#(OD0.6mm Max)
  - Material: Phosphor Bronze T=0.12mm
  - Finish: Tin Plated

深圳市森康达电子有限公司  
工程专用章


受控



SECTION: B-B

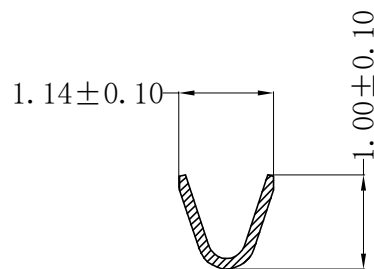

SECTION: A-A



Ordering Information

SCT0801T P S 110

Material Phosphor Bronze  
Contact Plated S= Tin plated

					OPERATION	DRAW	YANG	2016.06.06	SCALE	—	<p>SCONDAR ELECTRONIC LIMITED</p>
					X.X ±0.30	DESIGN			UNIT	mm	
					X.XX ±0.20	CHECK	ZHONG	2016.06.06	SIZE	A4	
					X.XXX ±0.10	APPROVE	Lisa	2016.06.06	SHEET	1/1	
AO	2016.06.06	NEW	—	—	Angle ±3°	PROJ.			Part No	SCT0801TPS110	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM TOL	TITLE:			0.80mm Pitch for SCT0801H Crimp Terminal Phosphor Bronze Tin(Sn) Plating 28-32AWG Reel MPQ=30KPCS		