
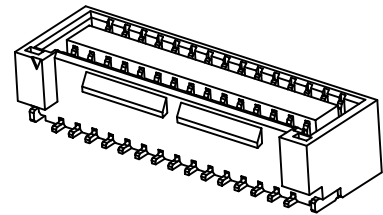


RoHS

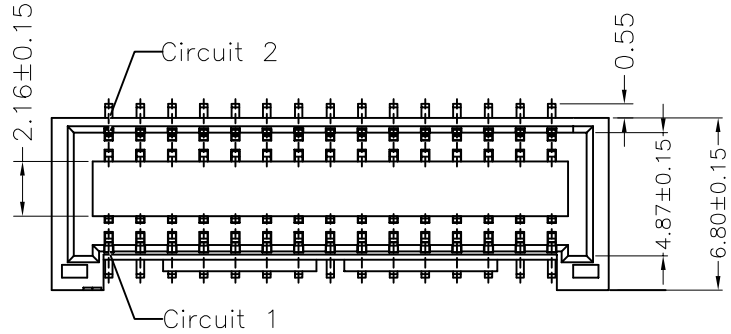




Specification:  
 -Current Rating: 1.0A AC/DC  
 -Voltage Rating: 50V AC/DC  
 -Insulation Resistance: 100MΩ Min  
 -Withstanding Voltage: 500VAC(1Min)  
 -Contact resistance: 30mΩ(Max).  
 -Operation Temperature: -25°C to +105°C

Material:  
 -Insulator (Housing): LCP (UL94-V0)  
 -Color: Beige  
 -Contacts: Brass/Gold Plated  
 -Solder Tabs: Brass/Tin Plated

**Ordering Information**

SCT12580WVS - 2xx F 1 BE 164

No. of Pins See Table  
 Insulation F=LCP  
 Package 1=Tape&Reel  
 Color BE=Beige

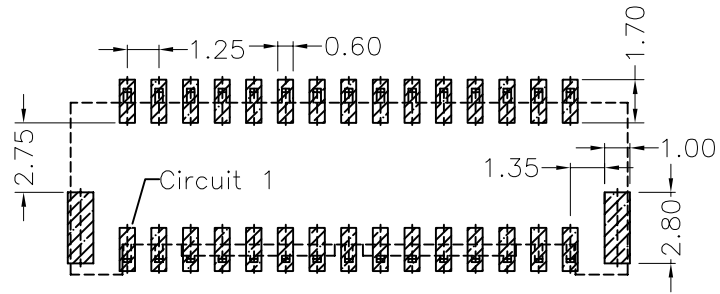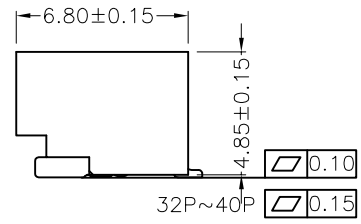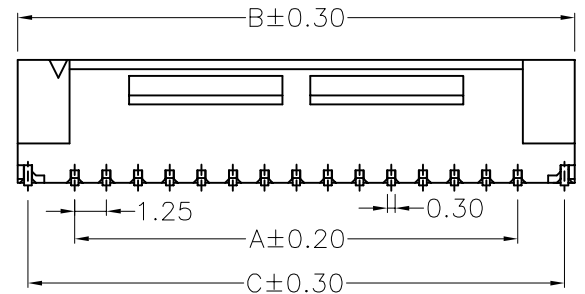

PCB LAYOUT

Dimensions			Part NO	PIN
A	B	C		
5.00	9.50	8.70	SCT12580WVS-205F1BE164	2x05
6.25	10.75	9.50	SCT12580WVS-206F1BE164	2x06
7.50	12.00	11.20	SCT12580WVS-207F1BE164	2x07
8.75	13.25	12.45	SCT12580WVS-208F1BE164	2x08
10.00	14.50	13.70	SCT12580WVS-209F1BE164	2x09
11.25	15.75	14.95	SCT12580WVS-210F1BE164	2x10
12.50	17.00	16.20	SCT12580WVS-211F1BE164	2x11
13.75	18.25	17.45	SCT12580WVS-212F1BE164	2x12
15.00	19.50	18.70	SCT12580WVS-213F1BE164	2x13
16.25	20.75	19.95	SCT12580WVS-214F1BE164	2x14
17.50	22.00	21.20	SCT12580WVS-215F1BE164	2x15
18.75	23.25	22.45	SCT12580WVS-216F1BE164	2x16
20.00	24.50	23.70	SCT12580WVS-217F1BE164	2x17
21.25	25.75	24.95	SCT12580WVS-218F1BE164	2x18
22.50	27.00	26.20	SCT12580WVS-219F1BE164	2x19
23.75	28.25	27.45	SCT12580WVS-220F1BE164	2x20

					OPERATION	DRAW	Xiong	2021.05.22	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.30	DESIGN			UNIT	mm		
					X.XX ±0.20	CHECK	Lisa	2021.05.24	SIZE	A4		
					X.XXX ±0.10	APPROVE			SHEET	1/1		Part No.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°	APPROVE			PROJ.		TITLE:	GHD 1.25mm LCP V0 Beige 2xxPin Brass Gold Plated SMT WV Soket Tape&Reel MPQ=1250PCS
					DIM TOL							

SCONDAR ELECTRONIC, LTD  
 ENGINEER 20241016