
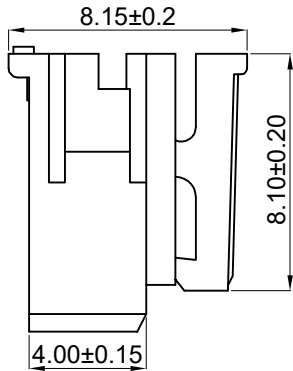
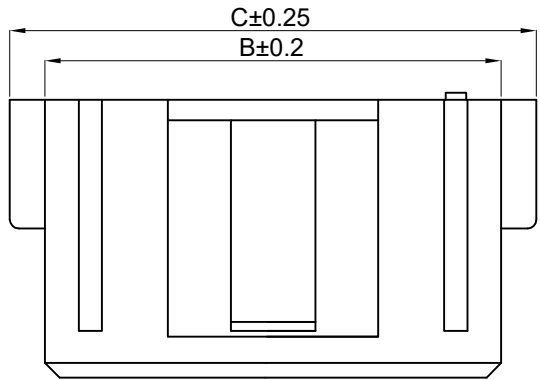


RoHS

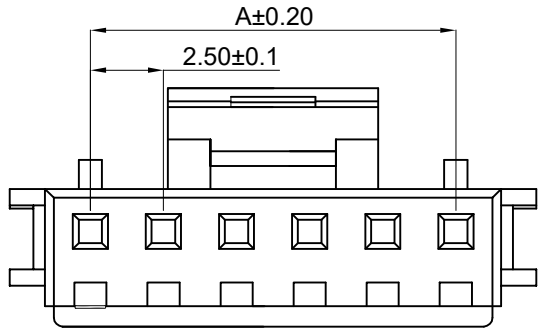


TECHNICAL PARAMETERS:
 Rated Current: 3A AC/DC
 Voltage Rated: 250V AC/DC
 Withstand voltage: 1000V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20mΩ(Max)
 Operating temperature: -25°C ~ +85°C
 Insulator Material: PA66 UL94V-0
 Colour: White

Ordering Information

SCT2521MH - xx B WT 169

No. of Pins: 10=10PIN
 Material: B=PA66 V0
 Colour: WT=White

NUMBER OF POSITIONS	DIMENSION		
	A	B	C
2	2.50	5.60	8.00
3	5.00	8.10	10.50
4	7.50	10.60	13.00
5	10.00	13.10	15.50
6	12.50	15.60	18.00
7	15.00	18.10	20.50
8	17.50	20.60	23.00
9	20.00	23.10	25.50
10	22.50	25.60	28.00
11	25.00	28.10	30.50
12	27.50	30.60	33.00
13	30.00	33.10	35.50
14	32.50	35.60	38.00
15	35.50	38.10	40.50

					OPERATION	DRAW	YaoQ	2016.06.15	SCALE	—	 SCONDAR ELECTRONIC LIMITED	
		<div style="border: 2px solid red; padding: 2px; color: red;"> SCONDAR ELECTRONIC, LTD ENGINEER XJ2412 </div>			X. X ±0.35	DESIGN	Lyao	2016.06.16	UNIT	mm		
					X. XX ±0.25	CHECK	Lisa	2016.06.18	SIZE	A4		
AO	2016.06.18		NEW	—	—	X. XXX ±0.15	APPROVE			SHEET		1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ±3°				PROJ.	⌀	TITLE:	25048HS 2.50mm PA66 V0 White xxP Male Housing
					DIM TOL							