

RoHS

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): PBT (UL94V-2)
- Color: Black




Ordering Information

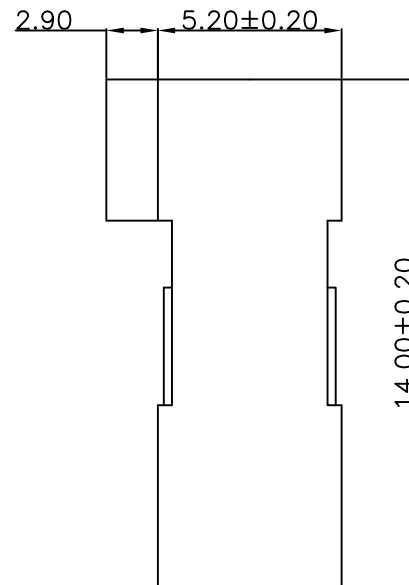
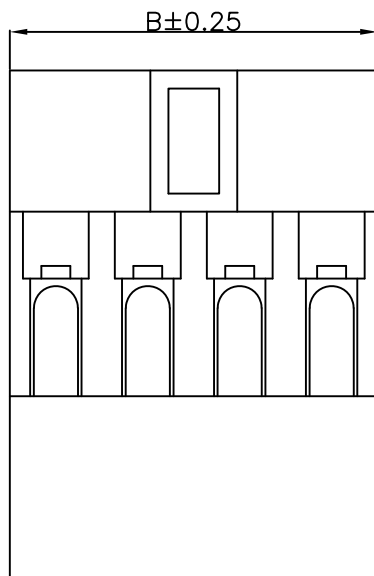
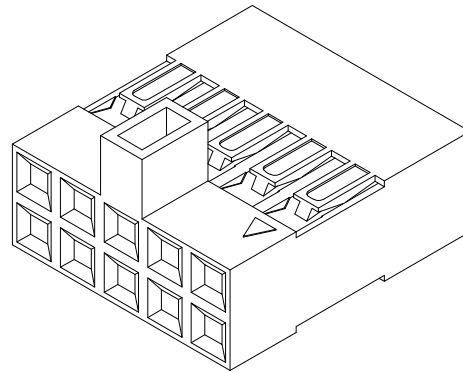
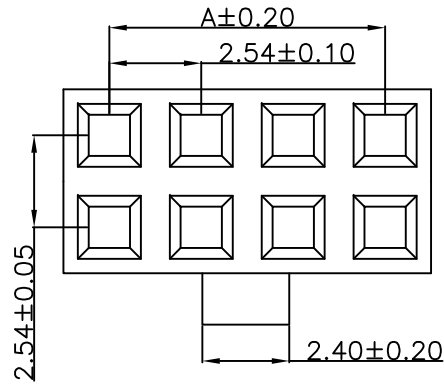
SCT2543HNNH -2xx D BK 116




No. of Pins  
See Table

Insulation  
D=PBT

Color  
BK=Black

2*40	99.06	101.60
2*39	96.52	99.06
2*38	93.98	96.52
		
2*4	7.62	10.16
2*3	5.08	7.62
2*2	2.54	5.08
Poles	A	B
	Dimensions	



REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.07	SCALE	-	SCONDAR ELECTRONIC LIMITED			
A1	2021.07.07	Changed from SCT2543HNNH-2xxP to SCT2543HNNH-2xxDBK116			X.X ±0.35	DESIGN			UNIT	mm				
AO	2019.10.15	NEW			X.XX ±0.25	CHECK	Lisa	2021.07.07	SIZE	A4				
					X.XXX ±0.15	APPROVE	Allen	2021.07.07	SHEET	1/1			PART NO.	SCT2543HNNH-2xxDBK116 
					Angle ± 3°				PROJ.				TITLE:	Dupont 2.54mm Pitch Housing Connector
					DIM TOL									