

RoHS

Specification:

- Current Rating: 34A AC/DC
- Voltage Rating: 600V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Contact resistance: 10mΩ(Max).
- Operation Temperature: -40°C to +105°C


Material:

- Insulator (Housing): PA66 (UL94V-0)
- Color: Black

Ordering Information

SCT7502FH - xx B BK 136

No. of Pins See Table
 Insulation B=PA66 V0
 Color BK=Black

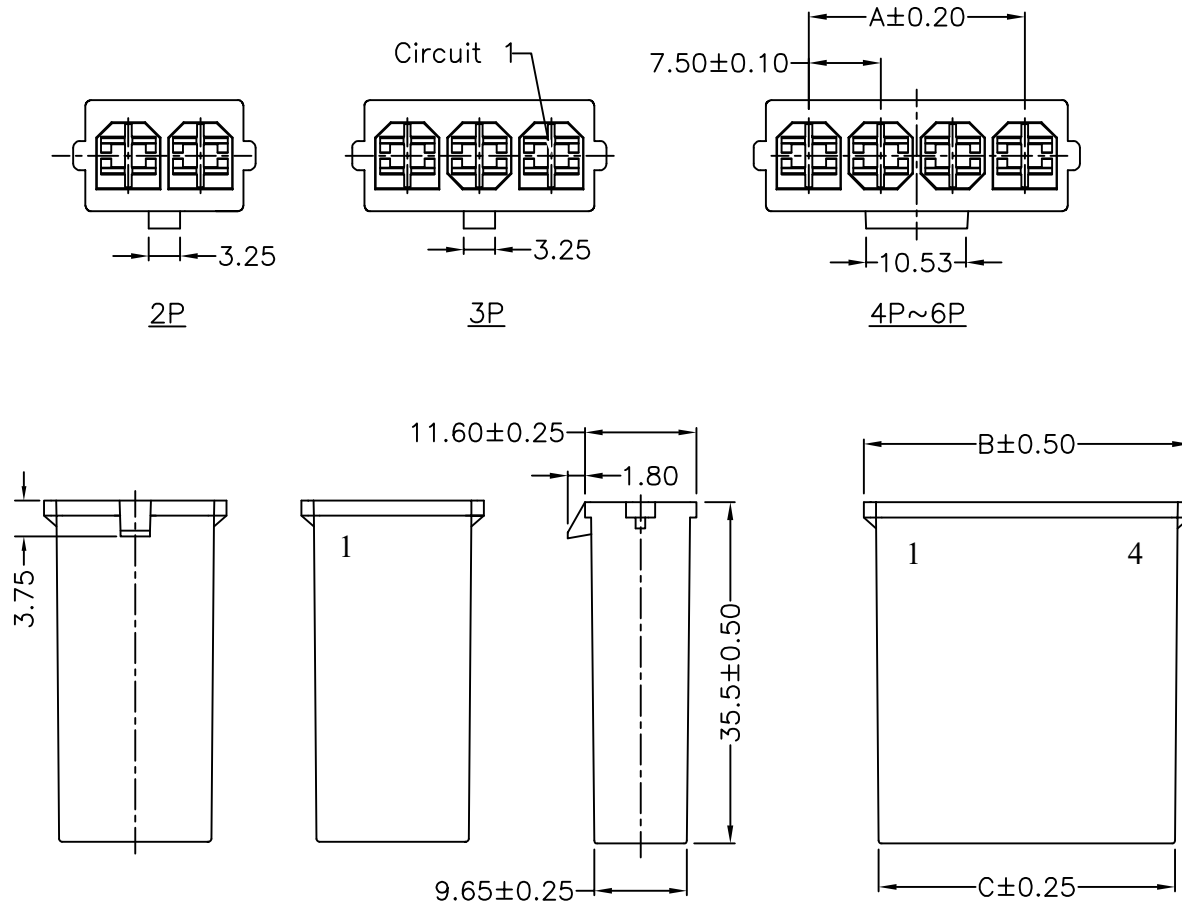

Poles	Dimensions		
	A	B	C
2	7.50	19.00	15.86
3	15.00	26.50	23.36
4	22.50	34.00	30.86
5	30.00	41.50	38.36
6	37.50	49.00	45.86

					OPERATION	DRAW	Peng	2021.07.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED		
		<div style="border: 2px solid red; padding: 2px;"> SCONDAR ELECTRONIC, LTD ENGINEER 20241021 </div>			X.X ±0.35	DESIGN			UNIT	mm			
					X.XX ±0.25	CHECK	Lisa	2021.07.06	SIZE	A4			
A0	2021.07.06		NEW			X.XXX ±0.15	APPROVE	Allen	2021.07.06	SHEET		1/1	PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle DIM	± 3° TOL	APPROVE	Allen	2021.07.06	PROJ.		TITLE:	MX43180 7.50mm PA66 V0 Black xxPin Female Housing