


# ROHS

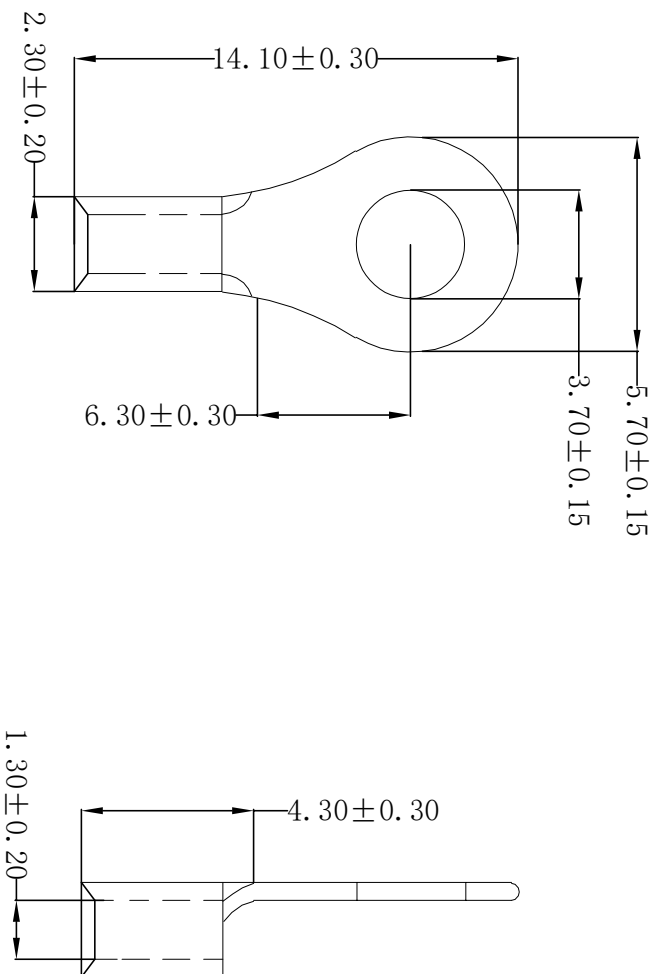

## Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 0.2~0.75mm<sup>2</sup>
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 10A
- USA Screw:#4
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	DESIGN	YANG	2016.06.06	SCALE	UNIT	SIZE	SHEET	PROJ.	TITLE:	PART NO.	SCRRB0.5-3.5M141	Terminal 370R copper Tin plated 0.2~0.75mm <sup>2</sup> wire, ID:3.70mm OD:5.70mm
A0	2016.06.06	NEW	---	---	X.X ±0.35	YANG	Lisa	2016.06.06	1/1	A4	1/1	SCRRB0.5-3.5M141						
					X.XX ±0.25													
					X.XXX ±0.15													
					Angle ±3°													
					DIM TOL													



SCONDAR ELECTRONIC LIMITED