



ROHS

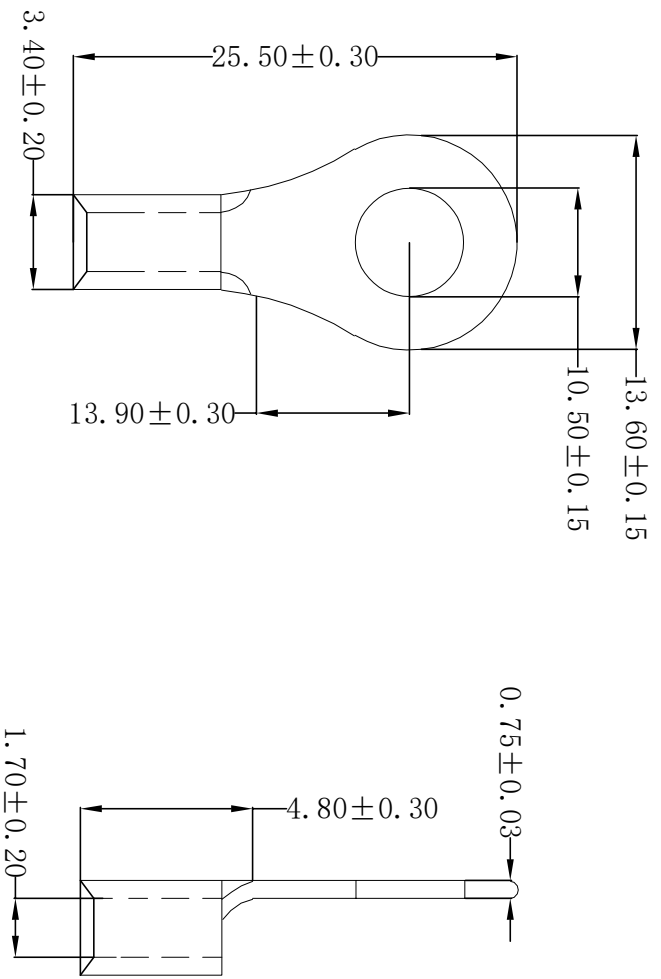

**Technical requirements:**

- Material: Copper (紫铜)
- Applicable wire: 0.50~1.50mm<sup>2</sup>
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 19A
- USA Screw: 3/8
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 SCONDAR ELECTRONIC LIMITED
A0	2016.06.06	NEW	---	---	X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3° DIM	DESIGN	Lisa	2016.06.06	mm	
						CHECK			A4	
						APPROVE			1/1	PART NO.
									PROJ.	SCTRNB1.25-10141 Terminal 1050R copper Tin plated 0.5~1.5mm <sup>2</sup> wire, ID:10.50mm OD:13.60mm MRQ=Kbps