



ROHS

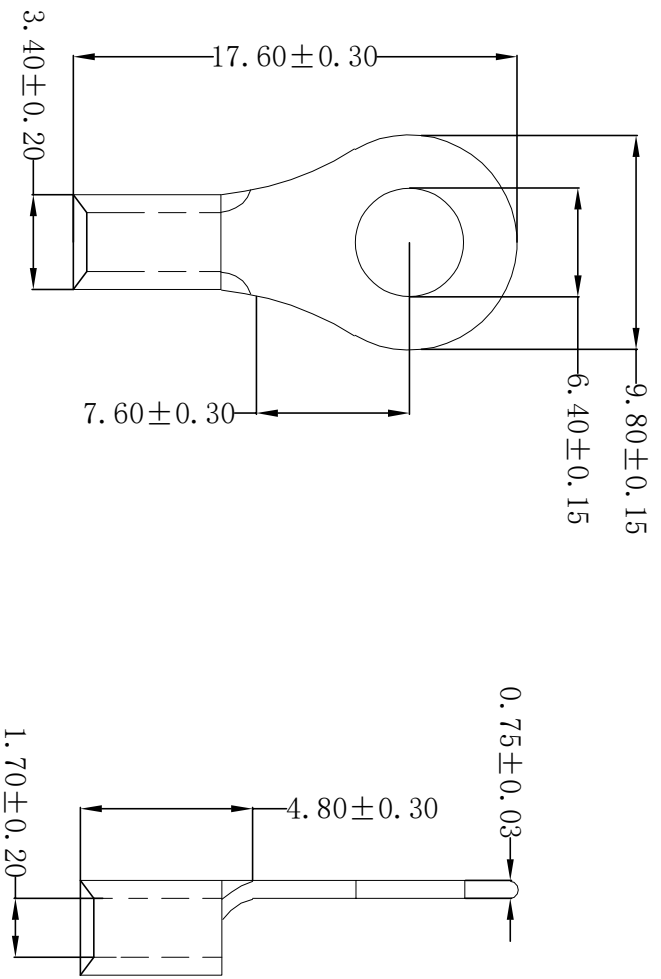

**Technical requirements:**

- Material: Copper (紫铜)
- Applicable wire: 0.50~1.50mm<sup>2</sup>
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 19A
- USA Screw: 1/4
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 <p>SCONDAR ELECTRONIC LIMITED</p>
A0	2016.06.06	NEW	---	---	X.X ±0.35	DESIGN		---	UNIT	
					X.XX ±0.25	CHECK	Lisa	1/1	mm	
					X.XXX ±0.15	APPROVE			SIZE	A4
					Angle ±3°				SHEET	1/1
					DIM TOL				PROJ.	1/1
									PART NO.	SCTRB1.25-6S141
									TITLE:	Terminal 640R copper Tin plated 0.5~1.5mm <sup>2</sup> wire, ID:6.40mm OD:9.80mm MPQ=1kpcs