



ROHS

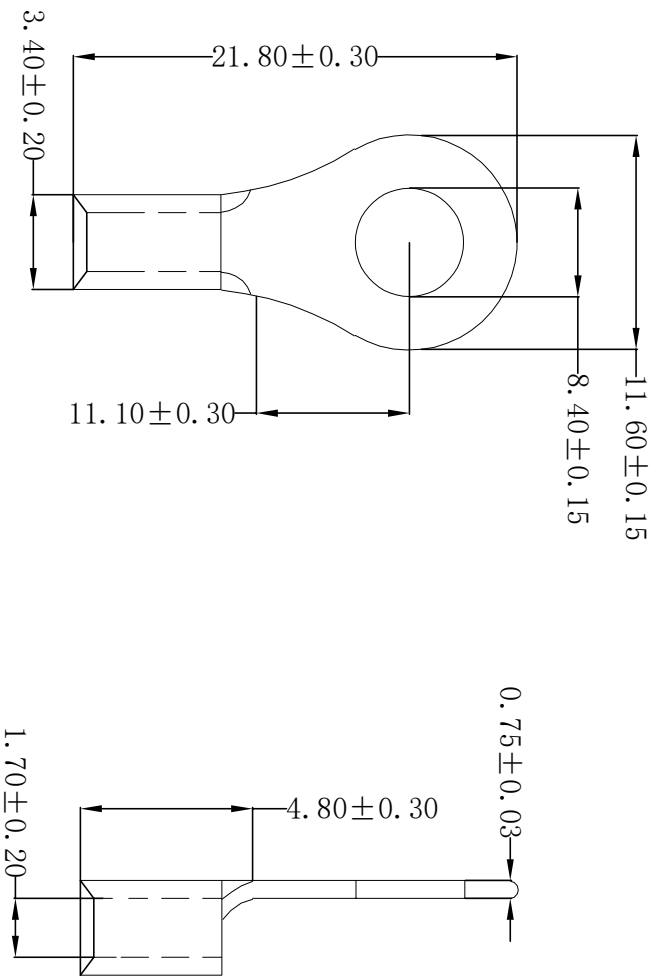

**Technical requirements:**

- Material: Copper (紫铜)
- Applicable wire: 0.50~1.50mm<sup>2</sup>
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 19A
- USA Screw: 5/16
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 <p>SCONDAR ELECTRONIC LIMITED</p>
A0	2016.06.06	NEW	---	---	DESIGN	Lisa	2016.06.06	mm		
					CHECK			A4		
					Angle			1/1	SHEET	PART NO.
					±0.35	APPROVE		1/1	PROJ.	SCTRRB1.25-8141
					±0.25					Terminal 840R copper Tin plated 0.5~1.5mm <sup>2</sup>
					±0.15					wire, ID:8.40mm OD:11.60mm MPQ=1K/box
					±3°					
					DIM					
					TOL					