



ROHS

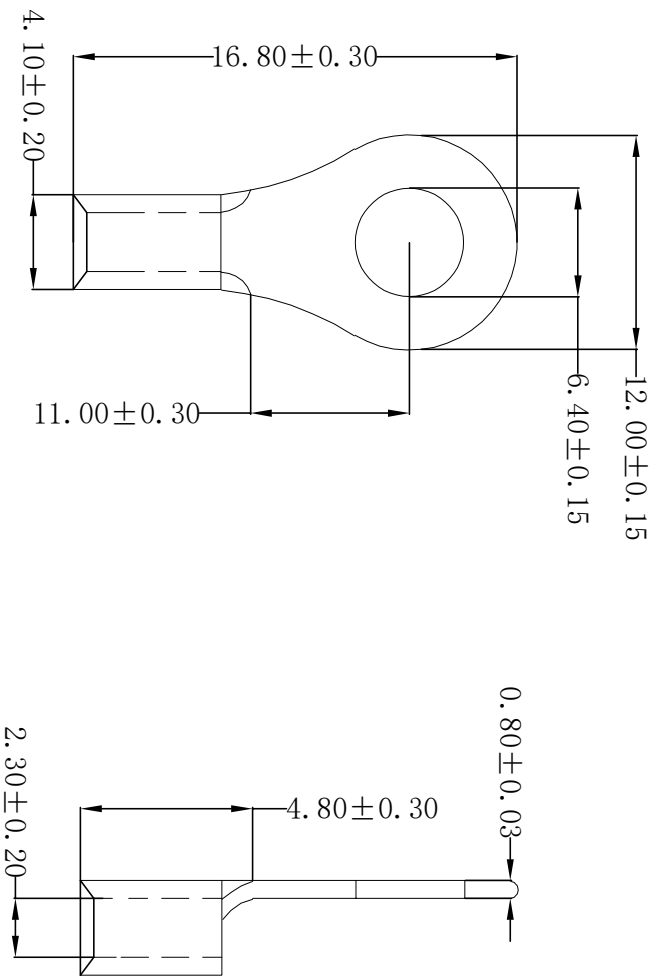

**Technical requirements:**

- Material: Copper (紫铜)
- Applicable wire: 1.50~2.50mm<sup>2</sup>
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 27A
- USA Screw: #1/4
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 SCONDAR ELECTRONIC LIMITED
A0	2016.06.06	NEW	---	---	DESIGN	Lisa	2016.06.06	mm		
					CHECK			A4		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	APPROVE			SHEET	PART NO.
1					Angle ±3°			1/1	1/1	SCTRRB2-6L141
					TOL			PROJ.		Terminal 640R copper Tin plated 1.5~2.5mm <sup>2</sup> wire, ID:6.40mm OD:12.00mm MPQ=1K/box