


ROHS

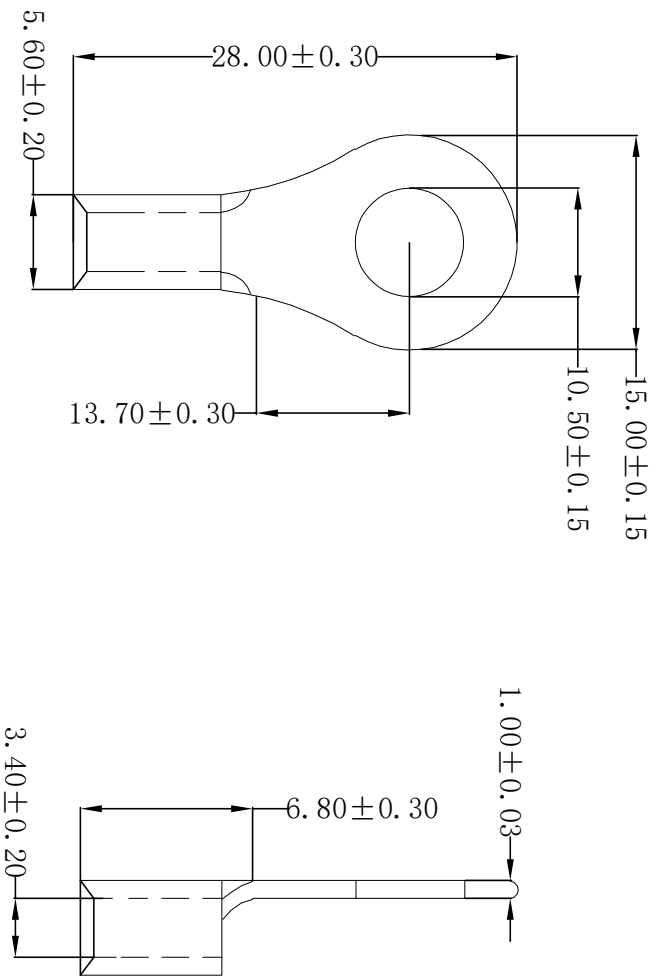

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 2.50~4.00mm²
- Surface treatment: Tin plating
- Plating thickness: 4.0um~6.0um
- Coating temperature: 120° /2H
- Max Current: 48A
- USA Screw: #3/8
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	<p>SCONDAR ELECTRONIC LIMITED</p>	<p>SCTRRB5.5-10141</p> <p>Terminal 1050R copper Tin plated 4.0~6.0um² wire, ID:10.50mm OP:12.00mm MRQ=Kbps</p>
A0	2016.06.06	NEW			DESIGN	Lisa	2016.06.06	A4			
					CHECK			1/1			
					ANGLE						
					DIM	APPROVE					
					TOL						