



ROHS

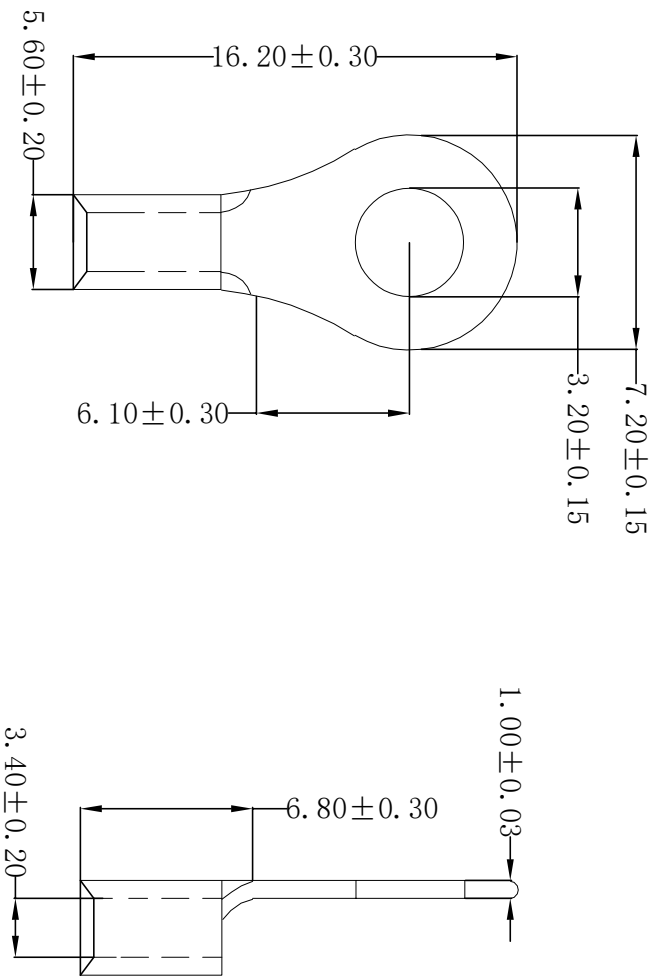

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 2.50~4.00mm²
- Surface treatment: Tin plating
- Plating thickness: 4.0um~6.0um
- Coating temperature: 120° /2H
- Max Current: 37A
- USA Screw:#4
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 <p>SCONDAR ELECTRONIC LIMITED</p>
A0	2016.06.06	NEW	---	---	X.X ±0.35	DESIGN		---	UNIT	
					X.XX ±0.25	CHECK	Lisa	1/1	mm	
					X.XXX ±0.15	APPROVE			SIZE	A4
					Angle ±3°				SHEET	1/1
					DIM				PROJ.	1/1
					TOL				PART NO.	SCTRRB5.5-3141
									TITLE:	Terminal 320R copper Tin plated 2.5~4.0mm ² wire, ID:3.20mm OD:7.20mm MRG=1boxes