



ROHS

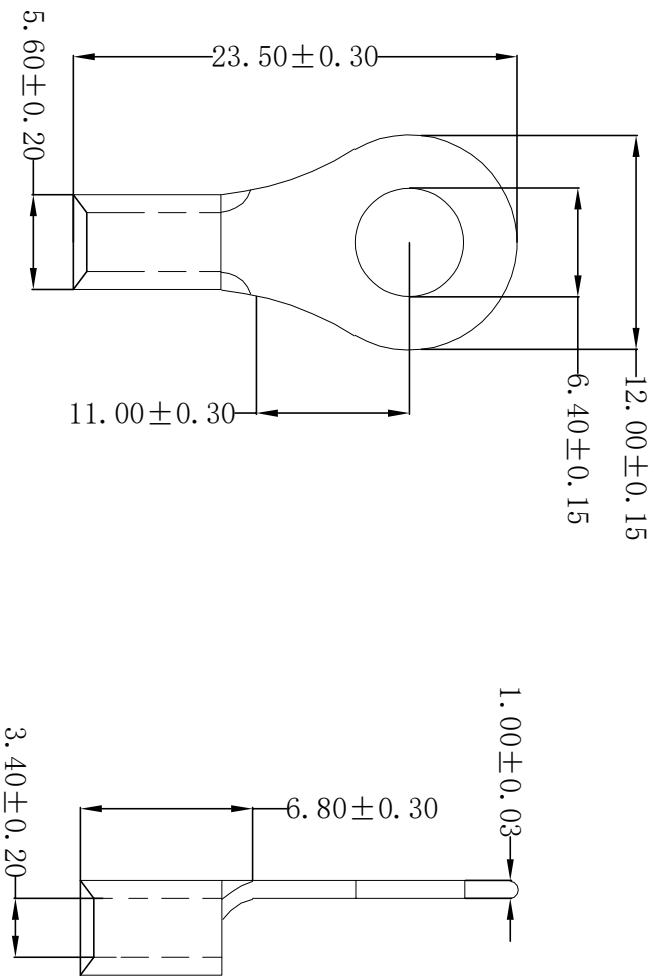

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 2.50~4.00mm²
- Surface treatment: Tin plating
- Plating thickness: 4.0um~6.0um
- Coating temperature: 120° /2H
- Max Current: 48A
- USA Screw: #10
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 <p>SCONDAR ELECTRONIC LIMITED</p>
A0	2016.06.06	NEW	---	---	X.X	DESIGN		---	UNIT	
					X.XX	CHECK	Lisa	---	SIZE	
					X.XXX			2016.06.06	SHEET	1/1
					Angle	APPROVE			PROJ.	
					±0.35					PART NO.
					±0.25					SCTRRB5-5-6141
					±0.15					Terminal 640R copper Tin plated 4.0~6.0mm ²
					±3°					wire, ID:6.40mm OD:12.00mm MPQ=1Kpcs
					TOL					