





RoHS

Ordering Information

FFC 050 C - xxP Lxxx S X -S3 B5 401

Pitch 05=0.5mm Model No.of Pins See Table Long L130=130mm Coating G=Gold S=Tin Strip Length S3=3mm Reinforcing tape length B5=5mm

UL Type
 0=NO-UL
 1=AWM 20624 80°C 60V VW-1
 2=AWM 20706 105°C 60V VW-1
 3=Other

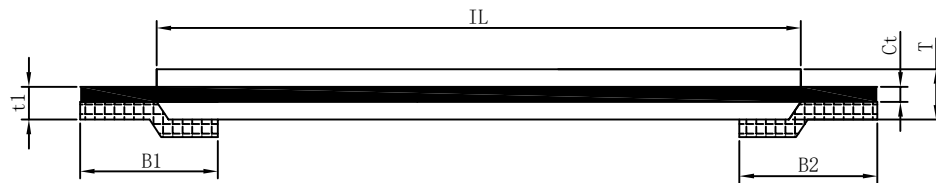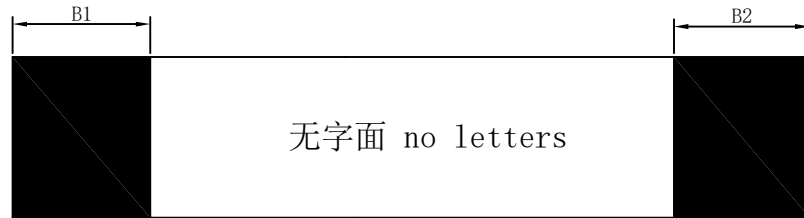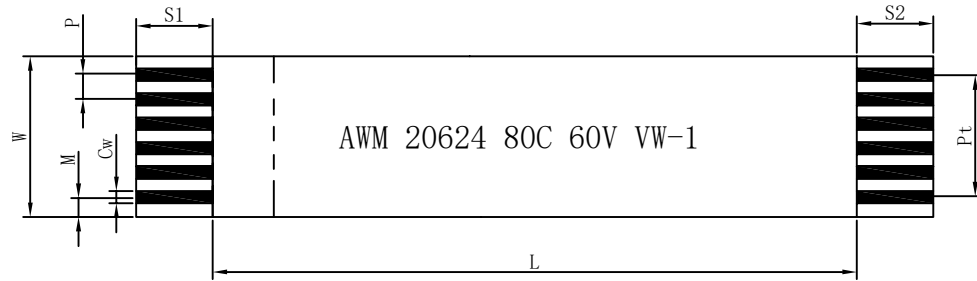

Item	项目		Specification 规格值
No.of conductors	导体芯数	N	3P-80P
Pith	间距	P	0.5±0.05
Total Pitch	全间距	Pt	0.5*(P-1)±0.08
Total Length	总长度	L	20-10000±(2-150)
Insulation Length	绝缘长度	IL	L-S1-S2±2.0
Margin Width	边缘宽度	M	0.5±0.08
Total Width	总宽度	W	0.5*(P+1)±0.08
Strip Length	线口长度	S1	3±0.5
Strip Length	线口长度	S2	3±0.5
Reinforeing tape length补强板长度		B1	5±1
Reinforeing tape length补强板长度		B2	5±1
Slanting	线口倾斜度	A	≤0.3
Slanting	线口倾斜度	B	/
Terminal thickness	插入厚度	tl	0.3±0.05
No.Thickness insulation	线身厚度	T	0.12±0.030
Conductor thickness	导体厚度	Ct	0.035±0.005
Conductor width	导体宽度	Cw	0.3±0.03
Supporting Tapc Color	补强板颜色		蓝色(Blue)
PET (Supporting Tapc Color)	补强板规格		0.225mm
PET (Insulation)	绝缘胶规格		0.043m(20624)
PET (Insulation)	绝缘胶规格		0.043mm(白膜)WT PET

		SCONDAR ELECTRONIC LTD ENGINEER LTD APPROVED		OPERATION		DRAW	Yao	2021.12.06	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
				X.X	±0.35	DESIGN	Xiong	2021.12.07	UNIT	mm		
				X.XX	±0.25		CHECK	Lisa	2021.12.09	SIZE		
AO	2021.12.09	NEW		X.XXX	±0.15	APPROVE		Allen		SHEET		
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	DIM	TOL		PROJ.	TITLE:		0.5*(3P-80P)*(20-10000)*C 3/3/5/5(0.035x0.3)(43LT+43WT)SPET225