


RoHS

Ordering Information

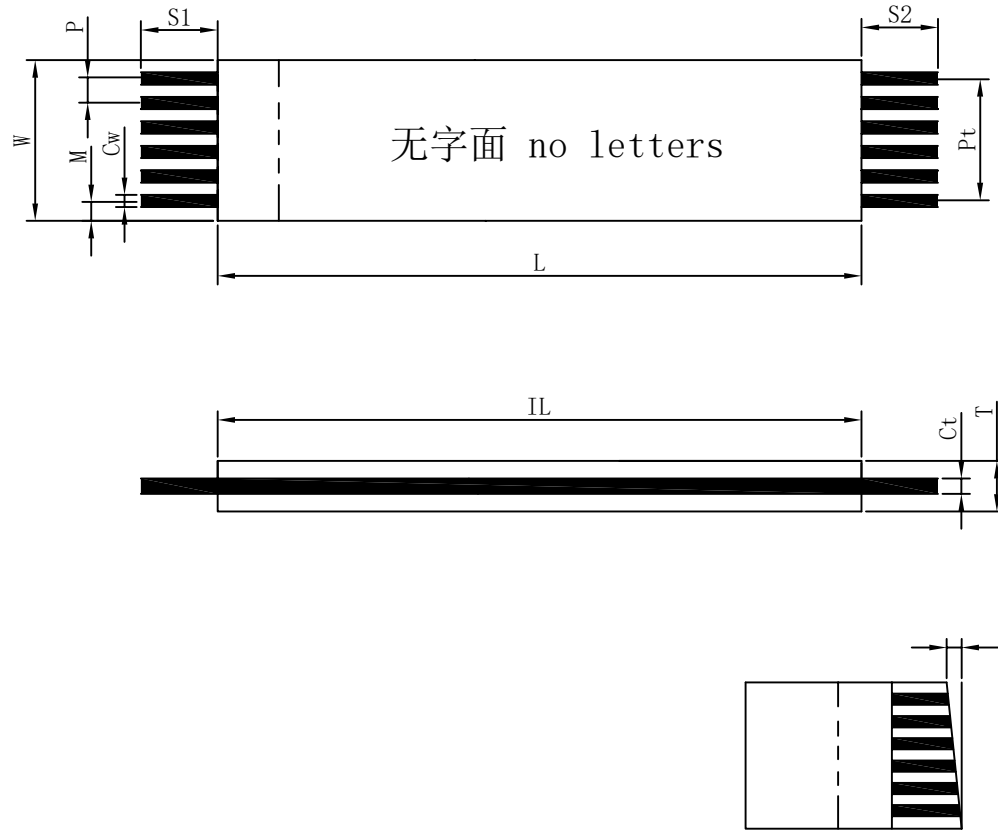

FFC 100 E - xxP Lxxx S 0 -S4 401

Pitch 100=1.00mm Model No.of Pins See Table Long L130=130mm Coating G=Gold S=Tin UL 0=NO-UL Strip Length S4=4mm

Item	项目		Specification 规格值
No.of conductors	导体芯数	N	3P-80P
Pith	间距	P	1.0±0.12
Total Pitch	全间距	Pt	1.0*(P-1)±0.12
Total Length	总长度	L	20-10000±(2-150)
Insulation Length	绝缘长度	IL	L-S1-S2±2.0
Margin Width	边缘宽度	M	1.0±0.12
Total Width	总宽度	W	1.0*(P+1)±0.12
Strip Length	线口长度	S1	4±0.5
Strip Length	线口长度	S2	4±0.5
Slanting	线口倾斜度	A	≤0.3
Slanting	线口倾斜度	B	≤0.5
No.Thickness insulation	线身厚度	T	0.22±0.030
Conductor thickness	导体厚度	Ct	0.1±0.005
Conductor width	导体宽度	Cw	0.6±0.03
PET (Insulation)	绝缘胶规格		0.060m
PET (Insulation)	绝缘胶规格		0.060mm WT PET

SCONDAR ELECTRONIC LTD
ENGINEER LTD APPROVED

					OPERATION	DRAW	Yao	2021.12.01	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
					X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15			SHEET	1/1	
AO	2021.12.04	NEW			Angle	± 3'			PART NO.	FFC100ExxPLxxxS0-S4401	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	DIM	TOL	APPROVE		PROJ.	 TITLE:	

1. 0*(3P-80P)*(20-10000)*E
4/4 (0. 1x0. 6) (60LT+60WT)