


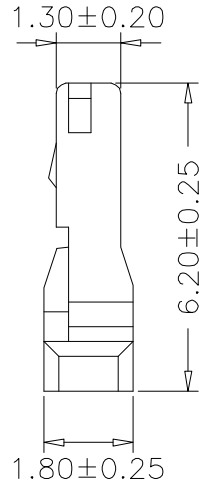
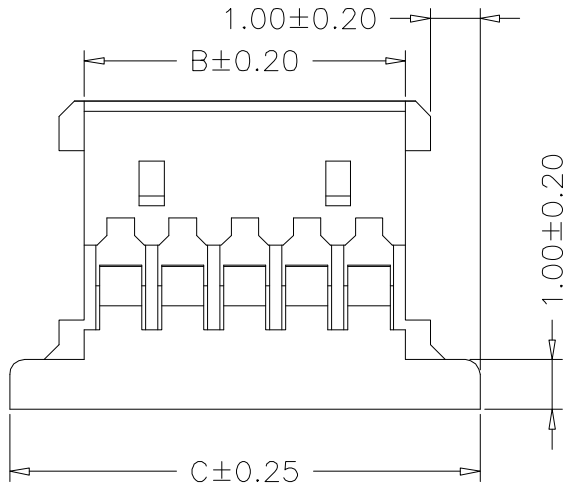
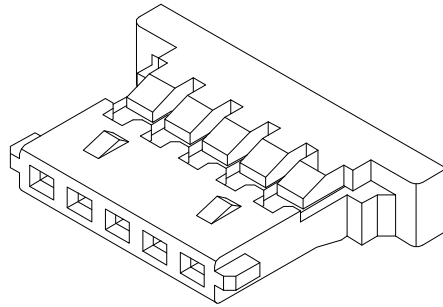


RoHS

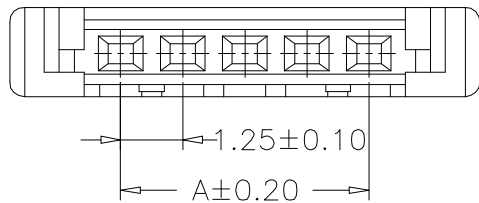

02P



03P

Specification:

- Current Rating: 1A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 100MΩ Min
- Withstanding Voltage: 500VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-0)
- Color: White

Ordering Information




SCT1254H - xx B WT 104

No.of Pins
See Table

Insulation
B=PA66

Color
WT=White

10	11.25	12.72	15.72				
9	10.00	11.47	14.47				
8	8.75	10.22	13.22	30	36.25	37.72	40.72
7	7.50	8.97	11.97	20	23.75	25.22	28.22
6	6.25	7.72	10.72	16	18.75	20.22	23.22
5	5.00	6.47	9.47	15	17.50	18.97	21.97
4	3.75	5.22	8.22	14	16.25	17.72	20.72
3	2.50	3.97	6.97	12	13.75	15.22	18.22
2	1.25	2.72	5.72	11	12.50	13.97	16.97
Poles	A	B	C	Poles	A	B	C
	Dimensions				Dimensions		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED
A1	2021.07.10	Changed from SCT1254H-xxP to SCT1254H-xxBWT104			X.X	±0.35			UNIT	mm	
AO	2006.05.02	NEW			X.XX	±0.25			SIZE	A4	
					X.XXX	±0.15		2021.07.10	SHEET	1/1	
					Angle	± 3'			PART NO.	SCT1254H-xxBWT104	
					DIM	TOL	APPROVE	Allen	2021.07.10	PROJ.	
									TITLE:	MX51146 1.25mm Pitch Housing Connector	