



RoHS

Specification:

- Current Rating: 1.5A AC/DC
- Voltage Rating: 50V AC/DC
- Insulation Resistance: 100MΩ (Min)
- Withstanding Voltage: 500VAC (1Min)
- Contact resistance: 20MΩ MAX.
- Operation Temperature: -25°C to +105°C

Material:

- Housing: LCP UL94V-0
- Color: Black
- PIN: Brass/Tin-plated, Gold-Plated
- Wafer Fixed Food: Bass/Tin-plated

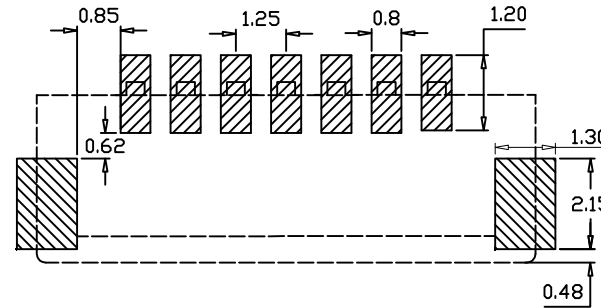
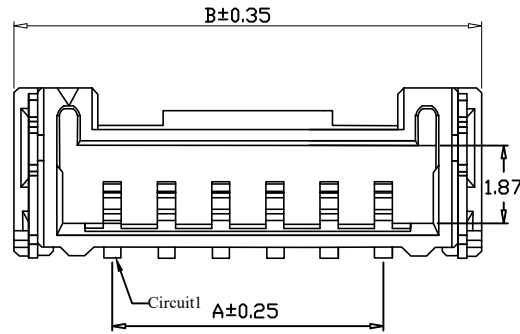


Recommended P.C.B Layout
General tolerance±0.05

Ordering Information

SCT1256WRS-XX F 1 BK 164

No. of Pins See Table
Insulation F=LCP
Package 0=PE Bag 1=Tape&Reel 2=Tube 3=Tray
Color BK=Black

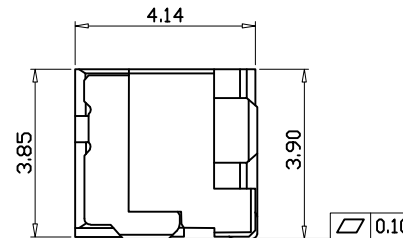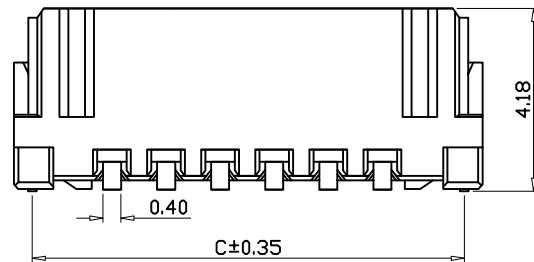

Dimensions				PIN	Dimensions			PIN
A	B	C	A		B	C		
1.25	5.75	4.90	2	11.25	15.75	14.90	10	
2.50	7.00	6.15	3	12.50	17.00	16.15	11	
3.75	8.25	7.40	4	13.75	18.25	17.40	12	
5.00	9.50	8.65	5	15.00	19.50	18.65	13	
6.25	10.75	9.90	6	16.25	20.75	19.90	14	
7.50	12.00	11.15	7	17.50	22.00	21.15	15	
8.75	13.25	12.40	8	18.75	23.25	22.40	16	
10.00	14.50	13.65	9					

SCONDAR ELECTRONIC LIMITED
ENGINEER YAO APPROVED

					OPERATION	DRAW	YAO	2023.9.13	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
					X.X ±0.35	DESIGN			UNIT	mm		
					X.XX ±0.25		CHECK	Lisa	2023.9.13	SIZE		A4
AO	2016.03.03	NEW			X.XXX ±0.15	APPROVE			SHEET	1/1		PART NO.
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	DIM	TOL		PROJ.	⌀	TITLE:	1.25mm LCP Black xxP Single SMT WR Tape&Reel