

RoHS

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 125V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 800VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon 66 (UL94V-2)
- Color: White


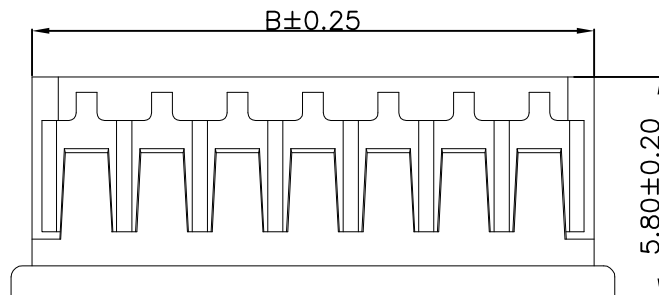
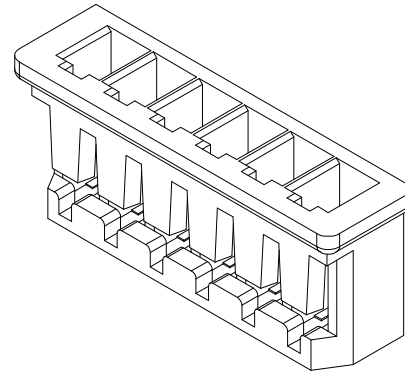
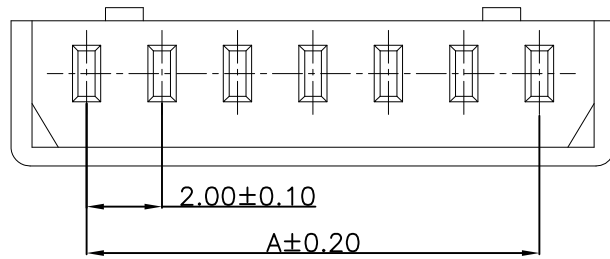
Ordering Information

SCT2002H - xx C WT 106



No.of Pins  
See Table

Insulation  
C=PA66 V2

Color  
WT=White



10	18.00	20.90			
9	16.00	18.90			
8	14.00	16.90			
7	12.00	14.90			
6	10.00	12.90	15	28.00	30.90
5	8.00	10.90	14	26.00	28.90
4	6.00	8.90	13	24.00	26.90
3	4.00	6.90	12	22.00	24.90
2	2.00	4.90	11	20.00	22.90
Poles	A	B	Poles	A	B
	Dimensions			Dimensions	

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
A1	2021.07.10	Changed from SCT2002H-xxP to SCT2002H-xxCWT106			X.X	±0.35			UNIT	mm		
AO	2010.04.02	NEW			X.XX	±0.25			SIZE	A4		
					X.XXX	±0.15			SHEET	1/1		
					Angle	± 3'			PROJ.		PART NO.	SCT2002H-xxCWT106
					DIM	TOL	APPROVE	Allen	2021.07.10	TITLE:	MX51004 2.00mm Pitch Housing Connector	