




RoHS

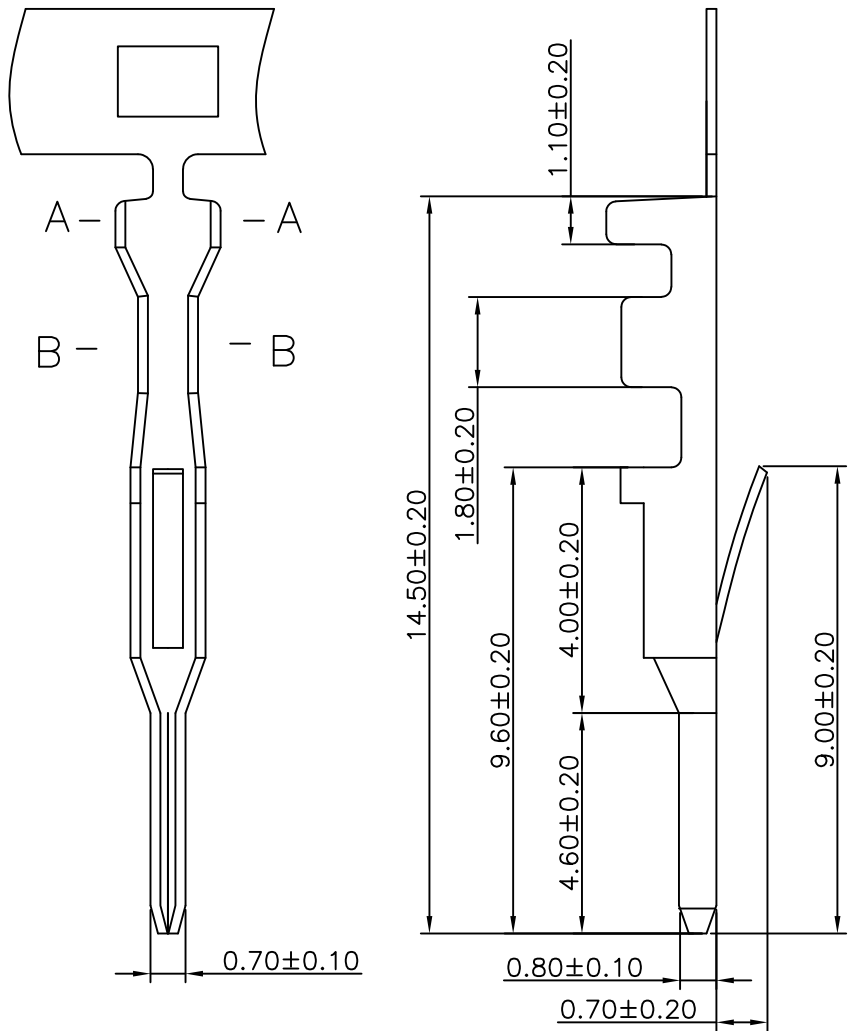

Specification:

- Current Rating: 2A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 800MΩ(Min)
- Withstanding Voltage: 500VAC(Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Wire Range: 22AWG~28AWG(OD:1.8mm)
- Material: Brass, T=0.20mm
- Finish: Tin Plated
- Q'TY: 8,000Pcs/Reel

Ordering Information

SCT2509MT B S 115

Material:
B=Brass
S=Tin Plated

东莞市晟凯达电子科技有限公司
工程专用章

受控

						OPERATION	DRAW	Peng	2021.07.10	SCALE	-	 SCONDAR ELECTRONIC LIMITED	
						X.X ±0.35	DESIGN			UNIT	mm		
						X.XX ±0.25		CHECK	Lisa	2021.07.10	SIZE		A4
A1	2021.07.10	Changed from SCT2509MT to SCT2509MTBS115				X.XXX ±0.15	APPROVE	Allen	2021.07.10	SHEET	1/1	PART NO.	SCT2509MTBS115
AO	2015.03.03	NEW				Angle ± 3'				PROJ.	☉	TITLE:	SMH 2.50mm Male Terminal
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE		DIM TOL							