

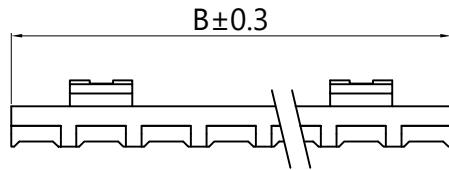




RoHS

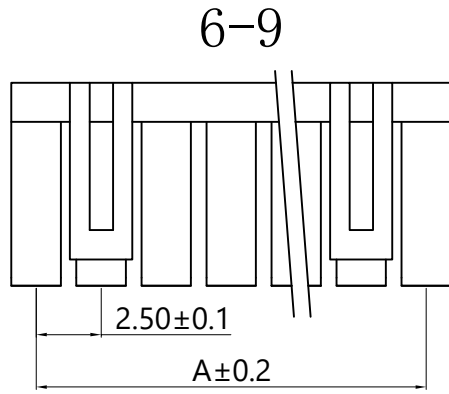

1-5



9-15

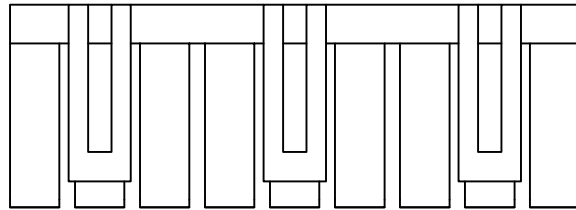

Specification:

- Current Rating: 3A AC/DC
- Voltage Rating: 250V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1000VAC(1Min)
- Contact resistance: 20mΩ(Max).
- Operation Temperature: -25°C to +85°C

Material:

- Insulator (Housing): Nylon66 (UL94V-0)
- Color: Natural

Ordering Information

SCT2518HS - ** B 0 NA 154

No. of Pins See Table
Insulation B=PA66 V0
Package 0=PE Bag 1= Tape&Reel 2=Tube 3=Tray
Color NA=Natural

Dimensions			PIN	Dimensions		
A	B	A		B	PIN	
2.50	4.40	2	20.00	21.90	9	
5.00	6.90	3	22.50	24.40	10	
7.50	9.40	4	25.00	26.90	11	
10.00	11.90	5	27.50	29.40	12	
12.50	14.40	6	30.00	31.90	13	
15.00	16.90	7	32.50	34.40	14	
17.50	19.40	8	35.00	36.90	15	

SCONDAR ELECTRONIC LIMITED
ENGINEER YAO APPROVED

					OPERATION	DRAW	Yang	2023.12.13	SCALE	-	<p>SCONDAR ELECTRONIC LIMITED</p>
					X.X ±0.35	DESIGN			UNIT	mm	
					X.XX ±0.25		CHECK	Lisa	2023.12.13	SIZE	
AO	2016.03.03	NEW			X.XXX ±0.15	APPROVE			SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle ± 3'	DIM TOL	APPROVE		PROJ.	⌀	TITLE: XA2.5mm PA66 V0 XXP NA Slip for Male Housing