
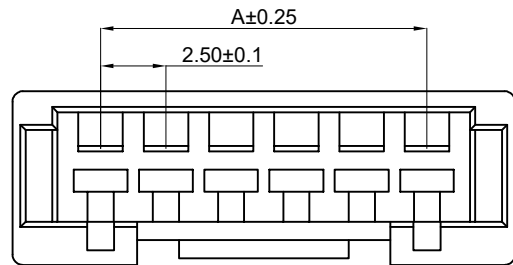
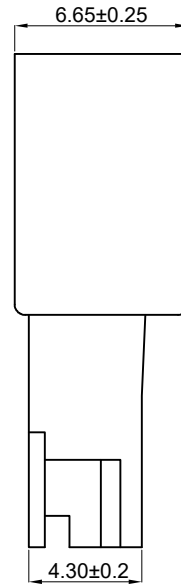


RoHS

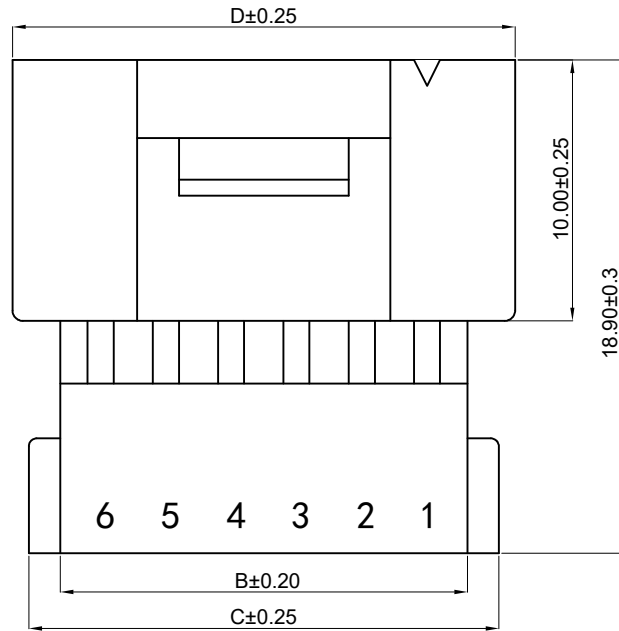

TECHNICAL PARAMETERS:
 Rated Current: 3A AC/DC
 Voltage Rated: 250V AC/DC
 Withstand voltage: 1000V AC/minute
 Insulation resistance: 1000MΩ min
 Contact resistance: 20mΩ(Max)
 Operating temperature: -25°C ~ +85°C
 Insulator Material: PA66 UL94V-0
 Colour: White

Ordering Information

SCT2521FH - xx B WT 169
No. of Pins: 110=1x10PIN; Material: B=PA66 V0; Colour: WT=White

NUMBER OF POSITIONS	DIMENSION			
	A	B	C	D
2	2.50	5.60	8.00	9.20
3	5.00	8.10	10.50	11.70
4	7.50	10.60	13.00	14.20
5	10.00	13.10	15.50	16.70
6	12.50	15.60	18.00	19.20
7	15.00	18.10	20.50	21.70
8	17.50	20.60	23.00	24.20
9	20.00	23.10	25.50	26.70
10	22.50	25.60	28.00	29.20
11	25.00	28.10	30.50	31.70
12	27.50	30.60	33.00	34.20
13	30.00	33.10	35.50	36.70
14	32.50	35.60	38.00	39.20
15	35.00	38.10	40.50	41.70

		<div style="border: 2px solid red; padding: 5px; color: red; text-align: center;"> SCONDAR ELECTRONIC, LTD ENGINEER XJ2412 </div>		OPERATION		DRAW	YaoQ	2016.06.15	SCALE	—
				X. X	±0.35				DESIGN	Lyao
AO	2016.06.18			NEW		X. XX	±0.25	CHECK	Lisa	2016.06.18
REV	DATE	MODIFICATION DESCRIPTION		CHANGE	APPROVE	APPROVE			SHEET	1/1
									PART NO.	SCT2521FH-xxBWT169
									PROJ.	TITLE: 25048HS 2.50mm PA66 V0 White xxP Female Housing

SCONDAR ELECTRONIC LIMITED