
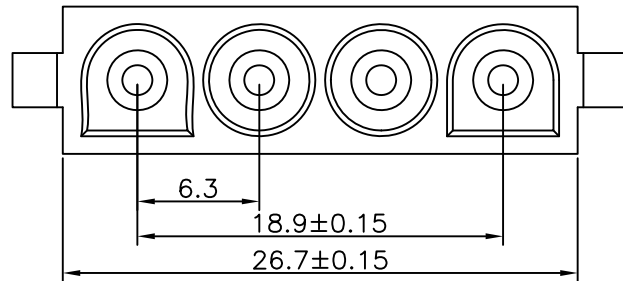
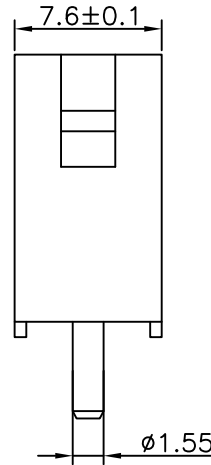


RoHS

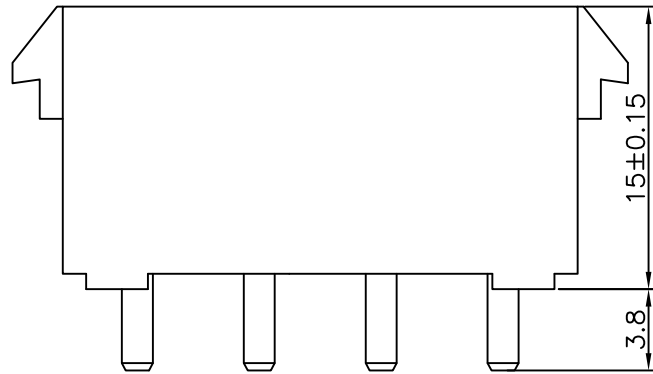

Specification:

- Current Rating: 13A AC/DC
- Voltage Rating: 300V AC/DC
- Insulation Resistance: 1000MΩ Min
- Withstanding Voltage: 1500VAC(1Min)
- Operation Temperature: -25°C to +85°C
- Contact resistance: 10mΩ(Max)


Material:

- Insulator Material: Nylon 66(UL94V-2)
- Contact Material: Brass
- Finish: Tin Plated
- Color: Natural

Ordering Information

SCT63080WV- 04 C 0 NA 115

No. of Pins: 04=4Pin
 Material: C=PA66 V2
 Package: 0=PE Bag
 Color: NA=Natural

					OPERATION	DRAW	Peng	2021.07.12	SCALE	-	 SCONDAR ELECTRONIC LIMITED
					X.X	±0.35			UNIT	mm	
A1	2021.07.12	Changed from SCT63080WV-04P to SCT63080WV-04C0NA115			X.XX	±0.25			SIZE	A4	
AO	2020.03.03	NEW			X.XXX	±0.15		2021.07.12	SHEET	1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	± 3'			PART NO.	SCT63080WV-04C0NA115	⚠
					DIM	TOL	APPROVE	Allen	2021.07.12	PROJ.	⊕
									TITLE:	MX42022 180° 4Pin Wafer	