



ROHS

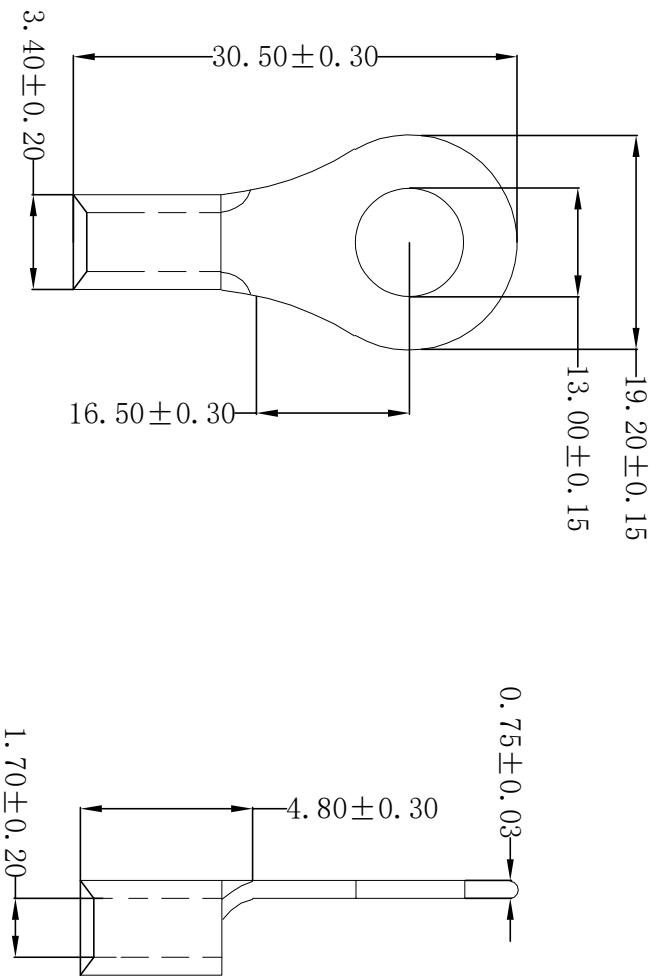

Technical requirements:

- Material: Copper (紫铜)
- Applicable wire: 0.50~1.50mm²
- Surface treatment: Tin plating
- Plating thickness: 2.5um~5um
- Coating temperature: 120° /2H
- Max Current: 19A
- USA Screw: 1/2
- Appearance: the body should not be scratched or oxidized
- Meet rosh and customer environmental requirements

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION	DRAW	YANG	2016.06.06	SCALE	 SCONDAR ELECTRONIC LIMITED
A0	2016.06.06	NEW	---	---	X.X	DESIGN		---	UNIT	
					X.XX	CHECK	Lisa	---	SIZE	
					X.XXX	APPROVE		---	SHEET	PART NO.
					Angle			---	PROJ.	TITLE:
					±0.35			---		Terminal 1300R copper Tin plated 0.5~1.5mm ²
					±0.25			---		wire, ID:13.00mm OD:19.20mm MRQ=Kpces
					±0.15			---		
					±3°			---		
					TOL			---		